PL 05
Face Recognition Device

√ Dynamic face recognition

√ Password

√ ID/IC card optional
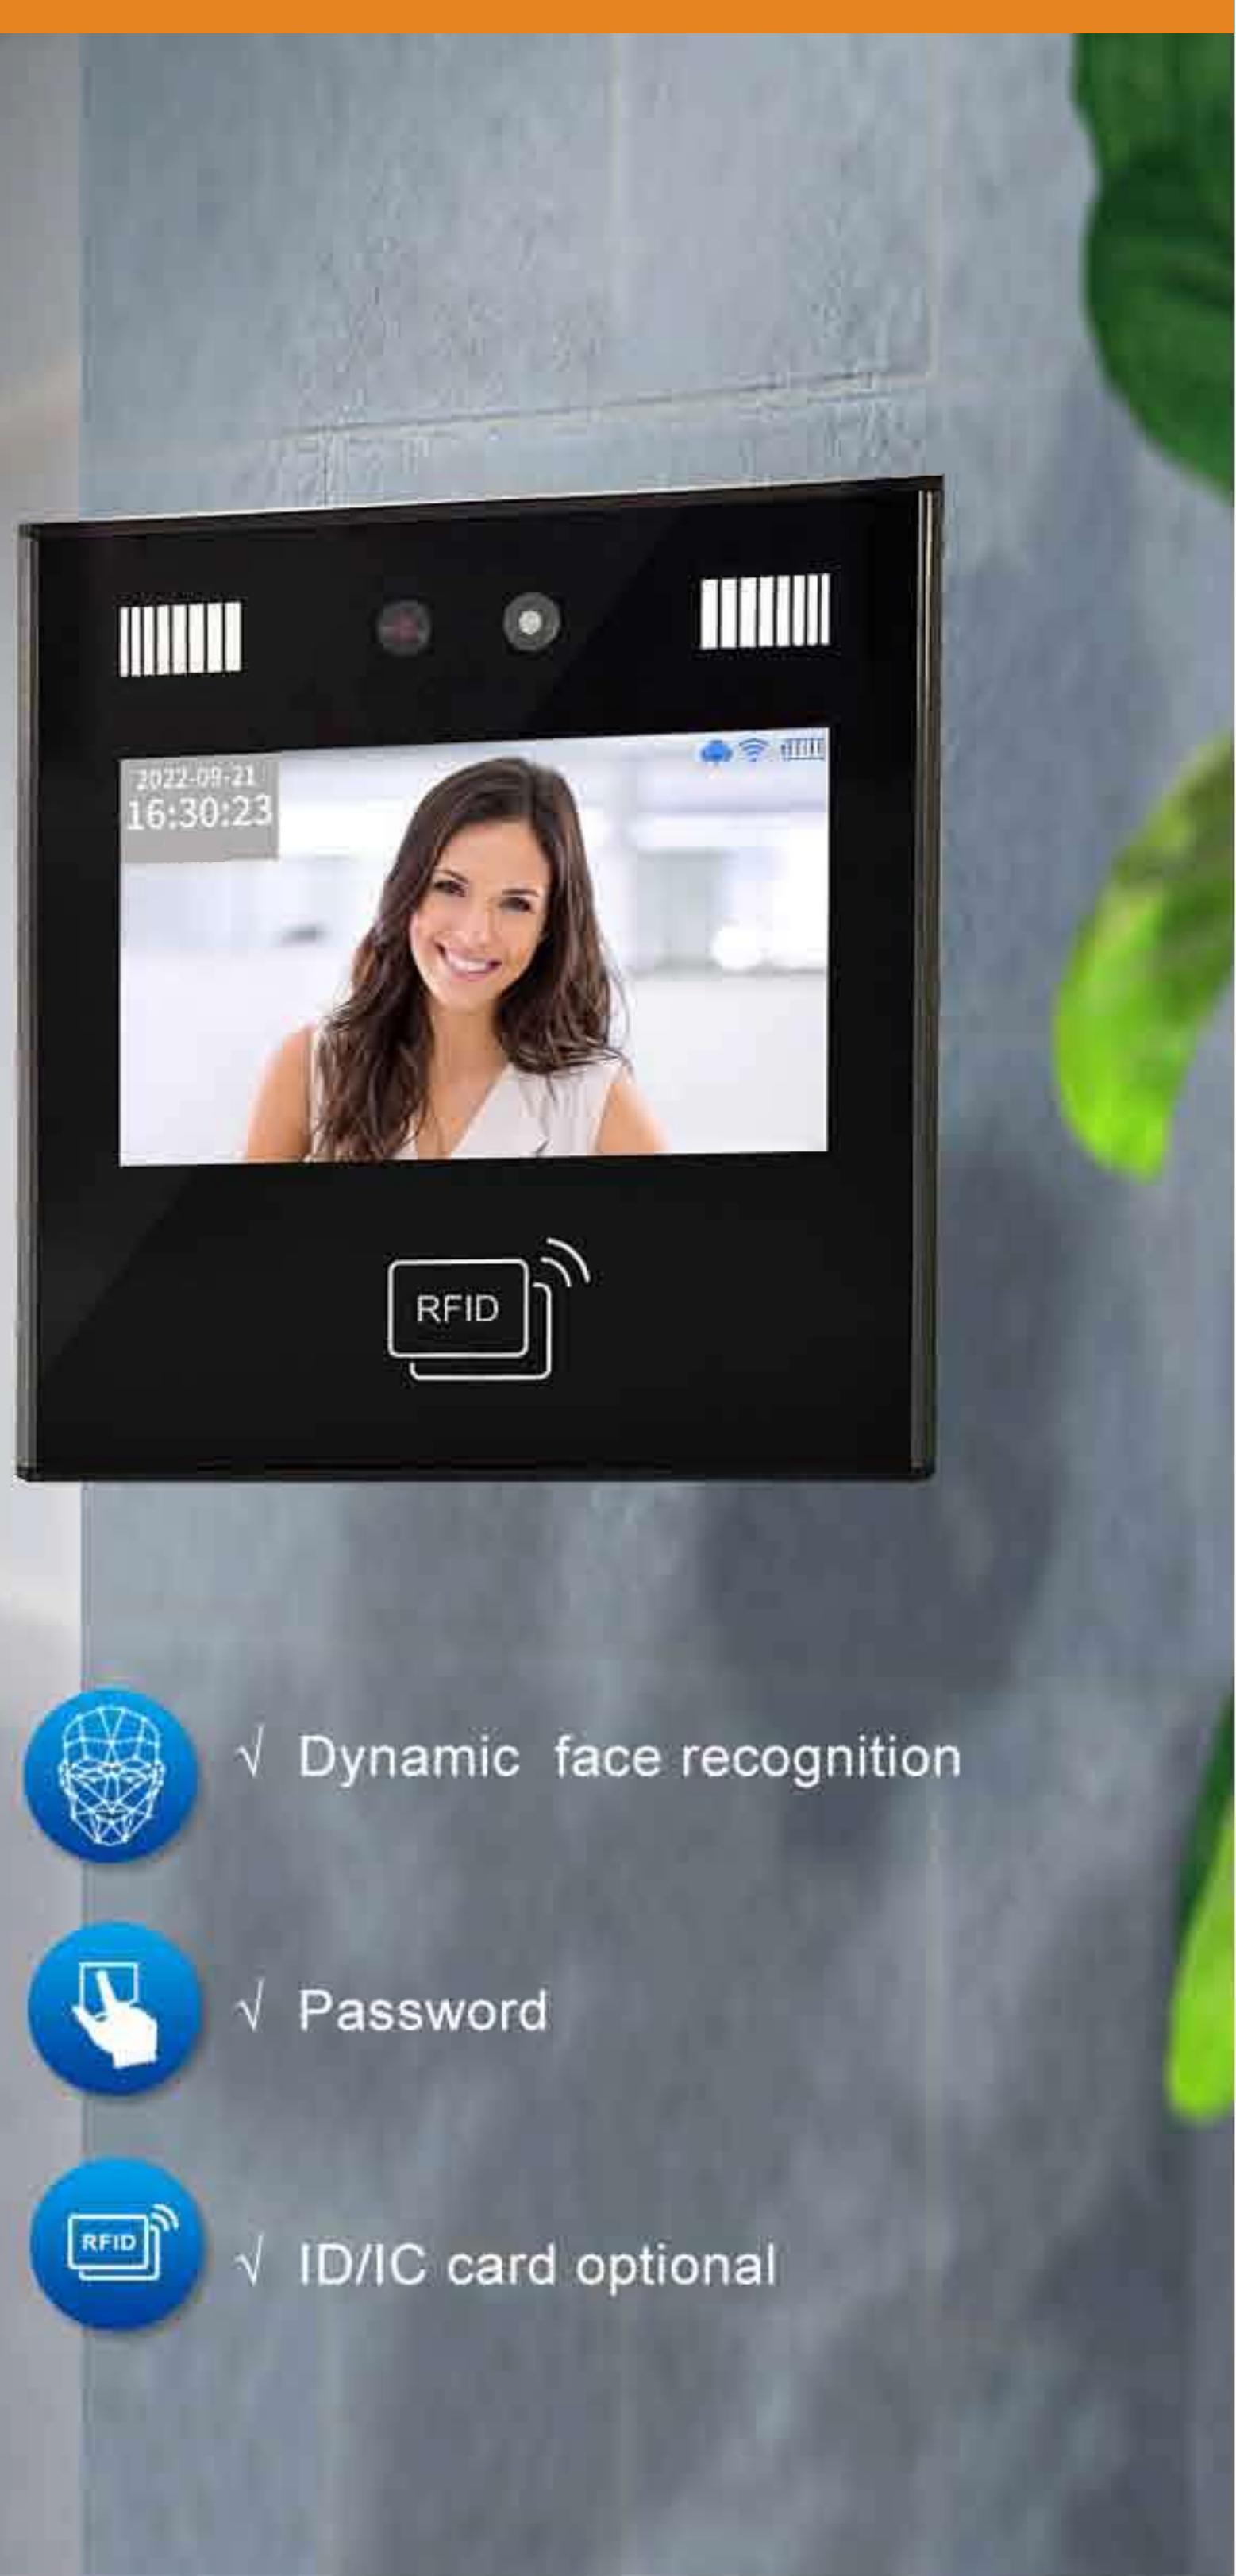
|		
5000	**0.5~2.5 meters**	**5000**
ID/IC Card Optional	Recognition Distance	Face Capacity
≤.02s	**WDR**	**4.3 inch**
Recognition Speed	2MP Colorful WDR	Screen Display
Touch Screen	Multi Language	Access Control
2MP	**272*480**	**99.70%**
Infrared live camera	HD Screen	Face Recognition Accuracy

Infrared Live Body Detection

Fast identify forehead, nose, chin, mouth, etc.

Forehead

Nose

Mouth

Chin

Wear Glasses   Makeup   Mustache   Black Face   Wear Veil   Wear Mask
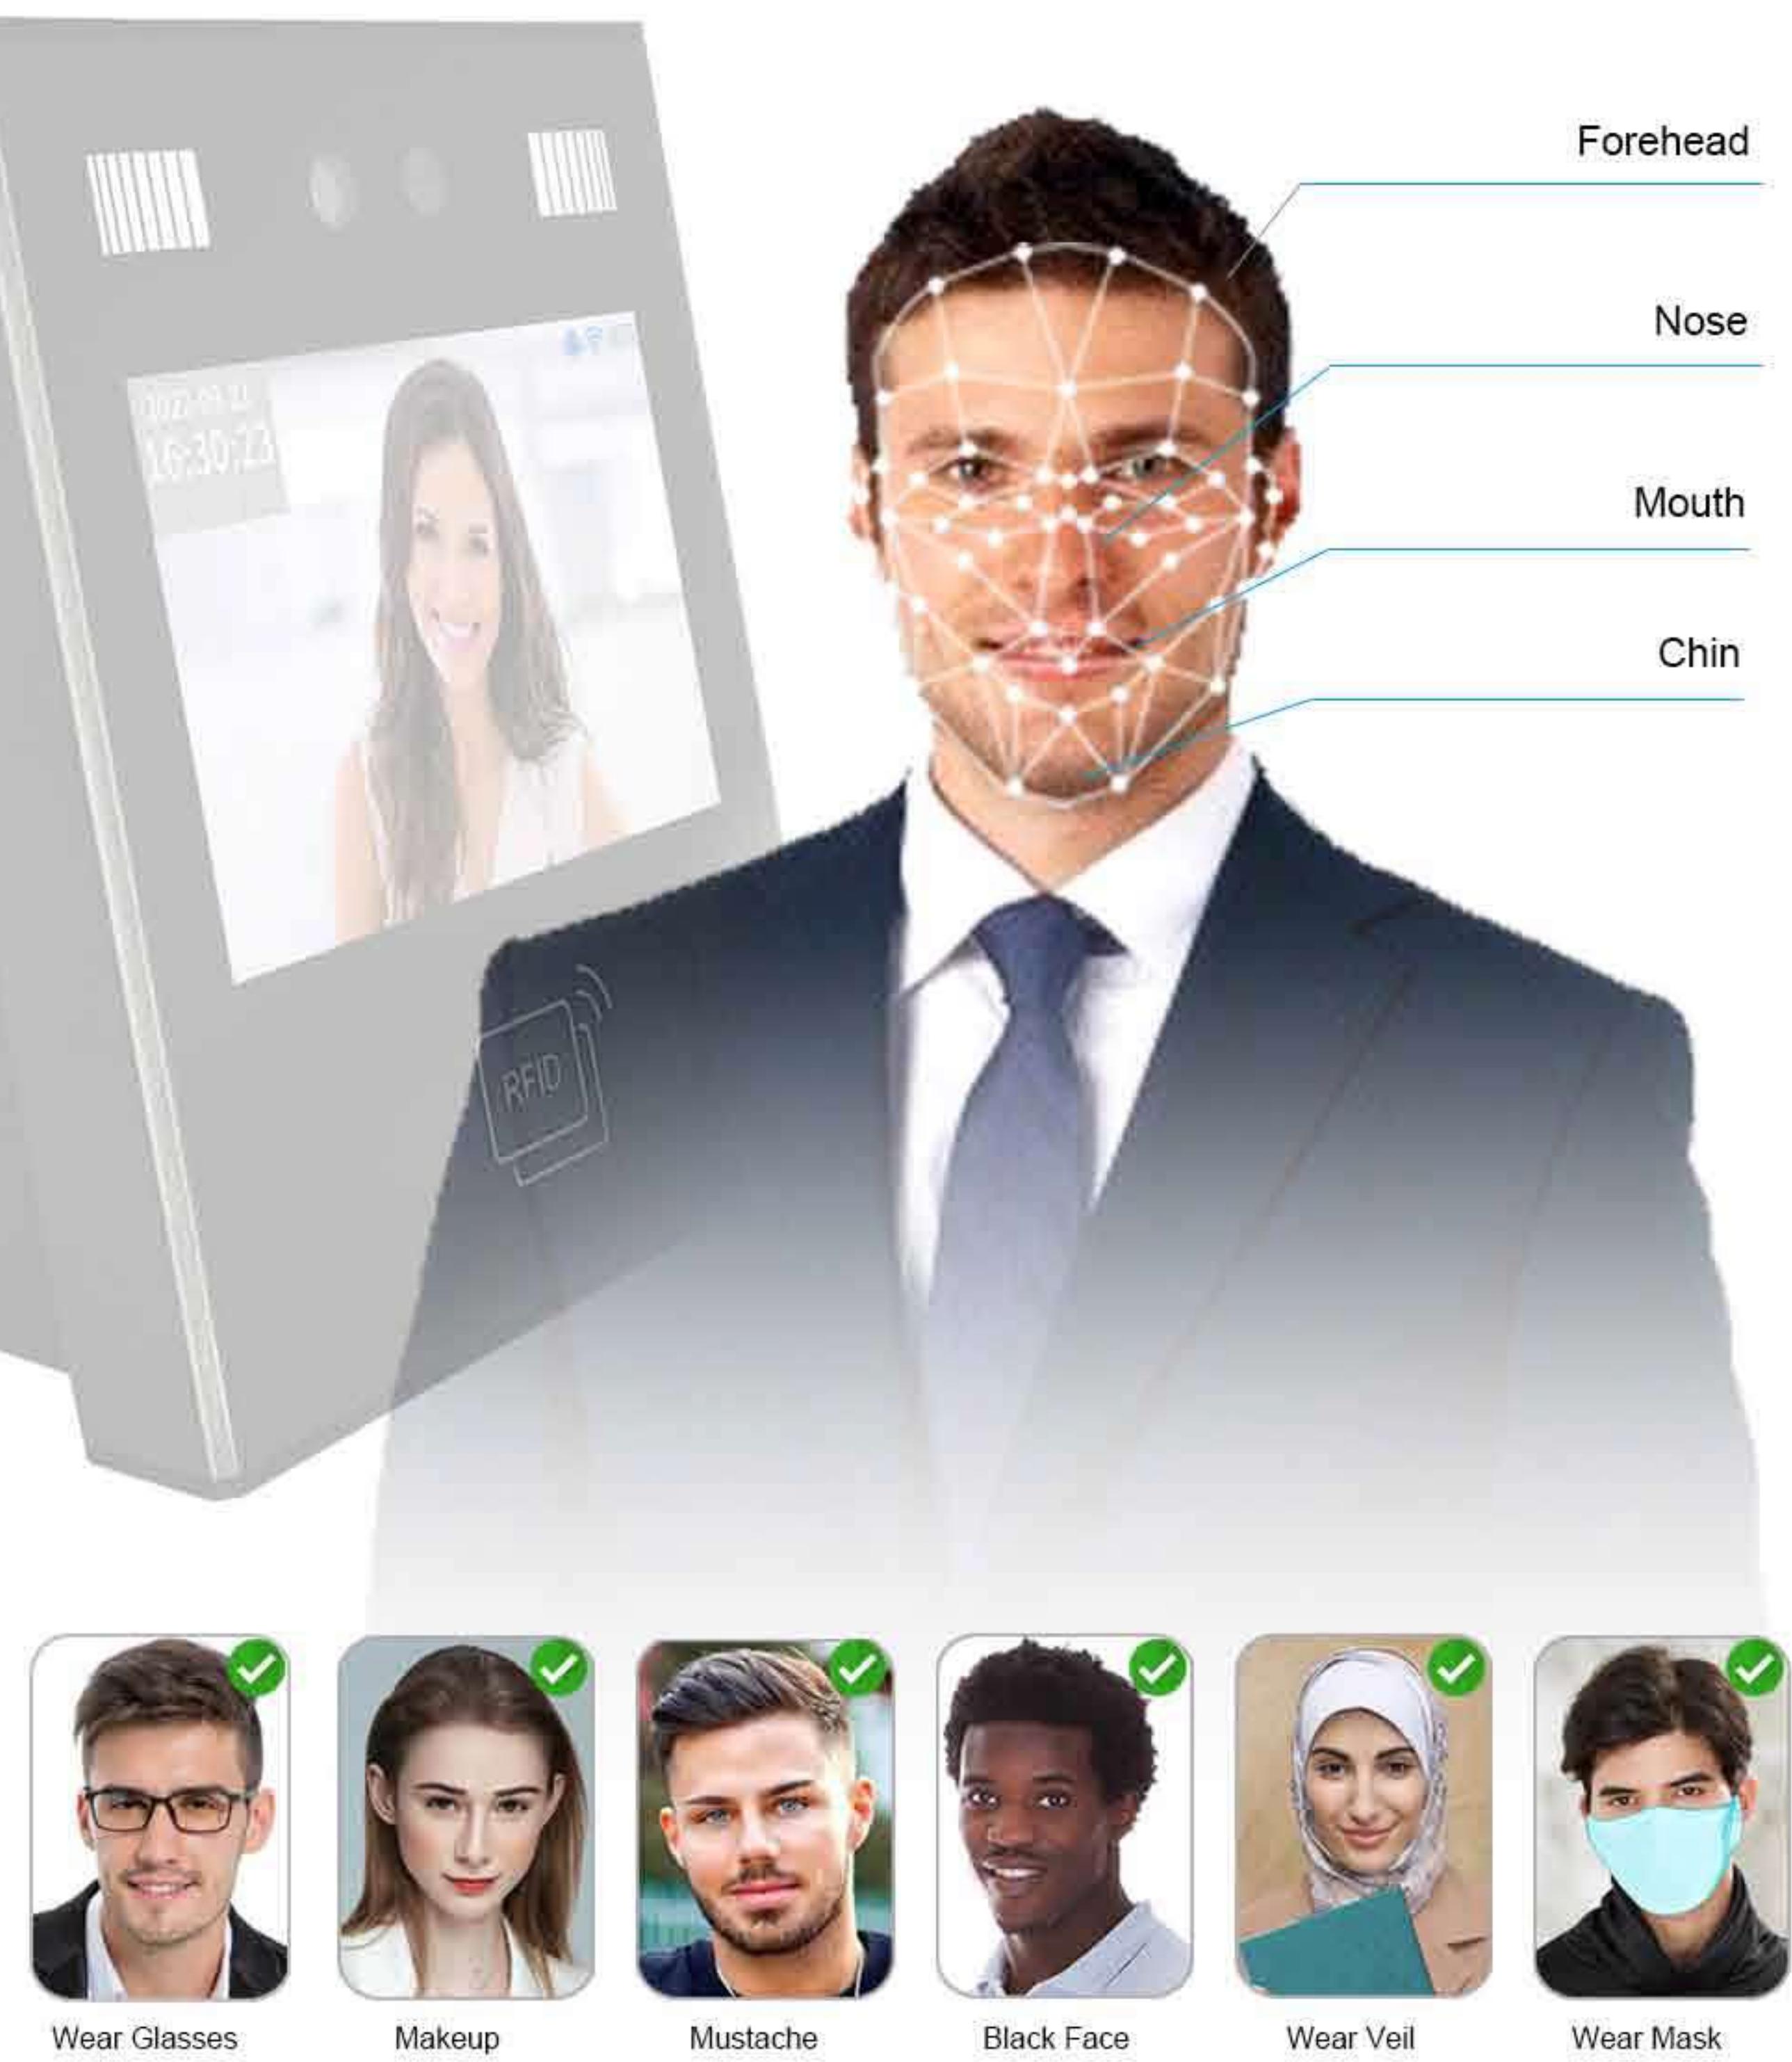
Time Attendance Access Control Terminal

Web Based Cloud Software

Wi Fi

Built-in Battery

Specifications

Screen	4.3 Inch Touch Screen
Keypad	Touch keypad
Operation system	LINUX 4.19
CPU	800M single-core ARM Cortex-A7
NPU	800G (0.8T) Hashrate
RAM, ROM	256M DDR3L, 4G EMMC
Camera	2MP color camera + 2MP infrared camera
Live detection	Dynamic dual-camera anti-counterfeiting, to prevent all kinds of black-and-white, color photos and videos from deception
Logs capacity	500000
Verification	Face recognition, password, ID Card(IC card optional)
Face capacity	5000
Card Capacity	5000
Password Capacity	5000
Face Recognition Accuracy	99.70%
Recognition Speed	≤0.2s
Recognition Distance	0.5~2.5 meters (0.5~1.5 meters with live face recognition on)
Principle of Identification	Face algorithm technology of multi-task cascaded convolutional neural network based on video stream for dynamic face detection, tracking and recognition
WDR	Wide dynamic range, support accurate face recognition under Strong light, dark light and backlight
USB	USB2.0x1，Support U disk import/export data
Power supply	DC12V 1A
Built-in Battery (optional)	7.4V, 2000mA
Network Communication	TCP/IP, USB, Wifi
Free Attendance sofware	Local software and web based cloud software
Mask Detection	Support mask detection and face recognition with mask on
Access Control Interface	Lock output Doorbell output/external ring Weigand input/output
Environmental adaptability	Working temperature: 0~45℃ Working humidity: 20% ~90% Dark enviroment: LEDSoft light automatic fll light (Automatic control according to ambient light)
Muti language	Support 20 national languages and voices including English, Spanish, Arabic, Thai, Farsi, Portuguese, French, Italian, Japanese, Korean, etc