

Product Model: 468 WA

Water Proof Cross-beam LED Digital Control Box



Sensitivity
Adjustable



Led
Display




High
Precision



Password
Protection



Led Light
Indicator




Volume
Adjustable



Modular
Design



Pc
Networking



Width
Customizable




Ups
Battery



Access Control
Connection

- 1- Multi Zones for enhanced precision in threat detection
- 2- High level detection accuracy for tiny metal
- 3- Quick and simple setup for immediate use
- 4- User-friendly operation

Conform to Electricity EN60950 Safety Standard
Conform to Radiation EN50081-1 Standard
Conform to Anti-interference EN50082-1 Standard

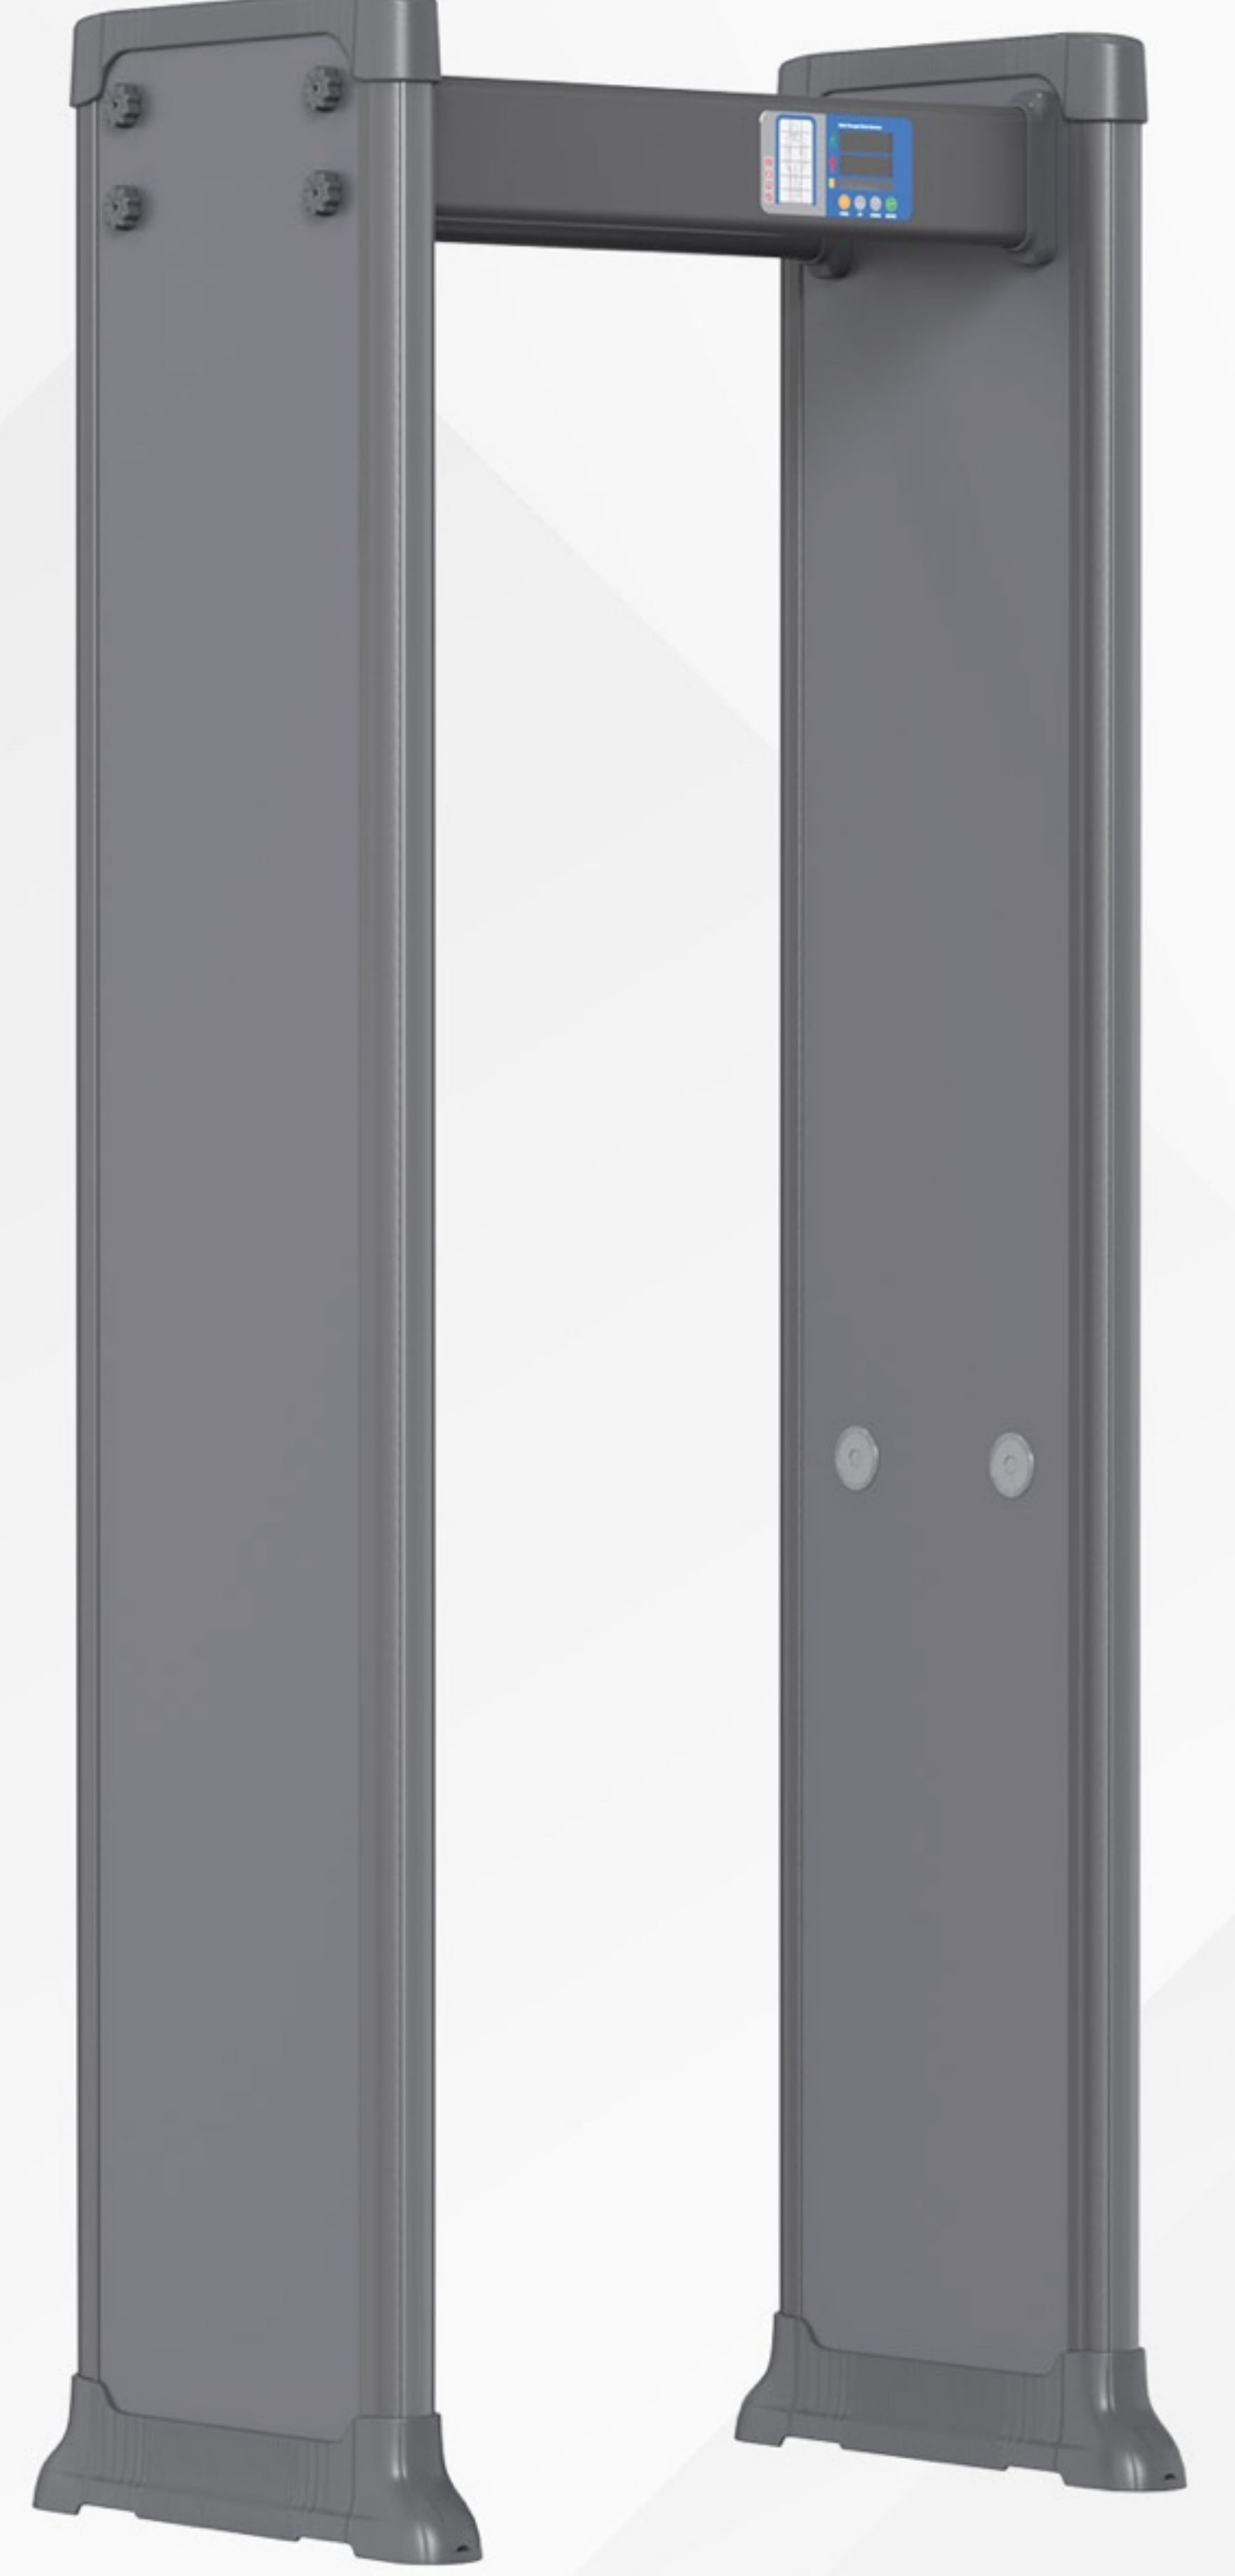


Made in
Türkiye



Product Specification

Overall Exterior Size	2204*870*580mm
Passageway Interior Size	2010*720*580mm
Operating Voltage	AC100V~240V 50/60Hz
Power	12W
Operating Temperatures	-20°C~65°C
Installation Environment	Width 100cm* Length 200cm (minimum range without metal)

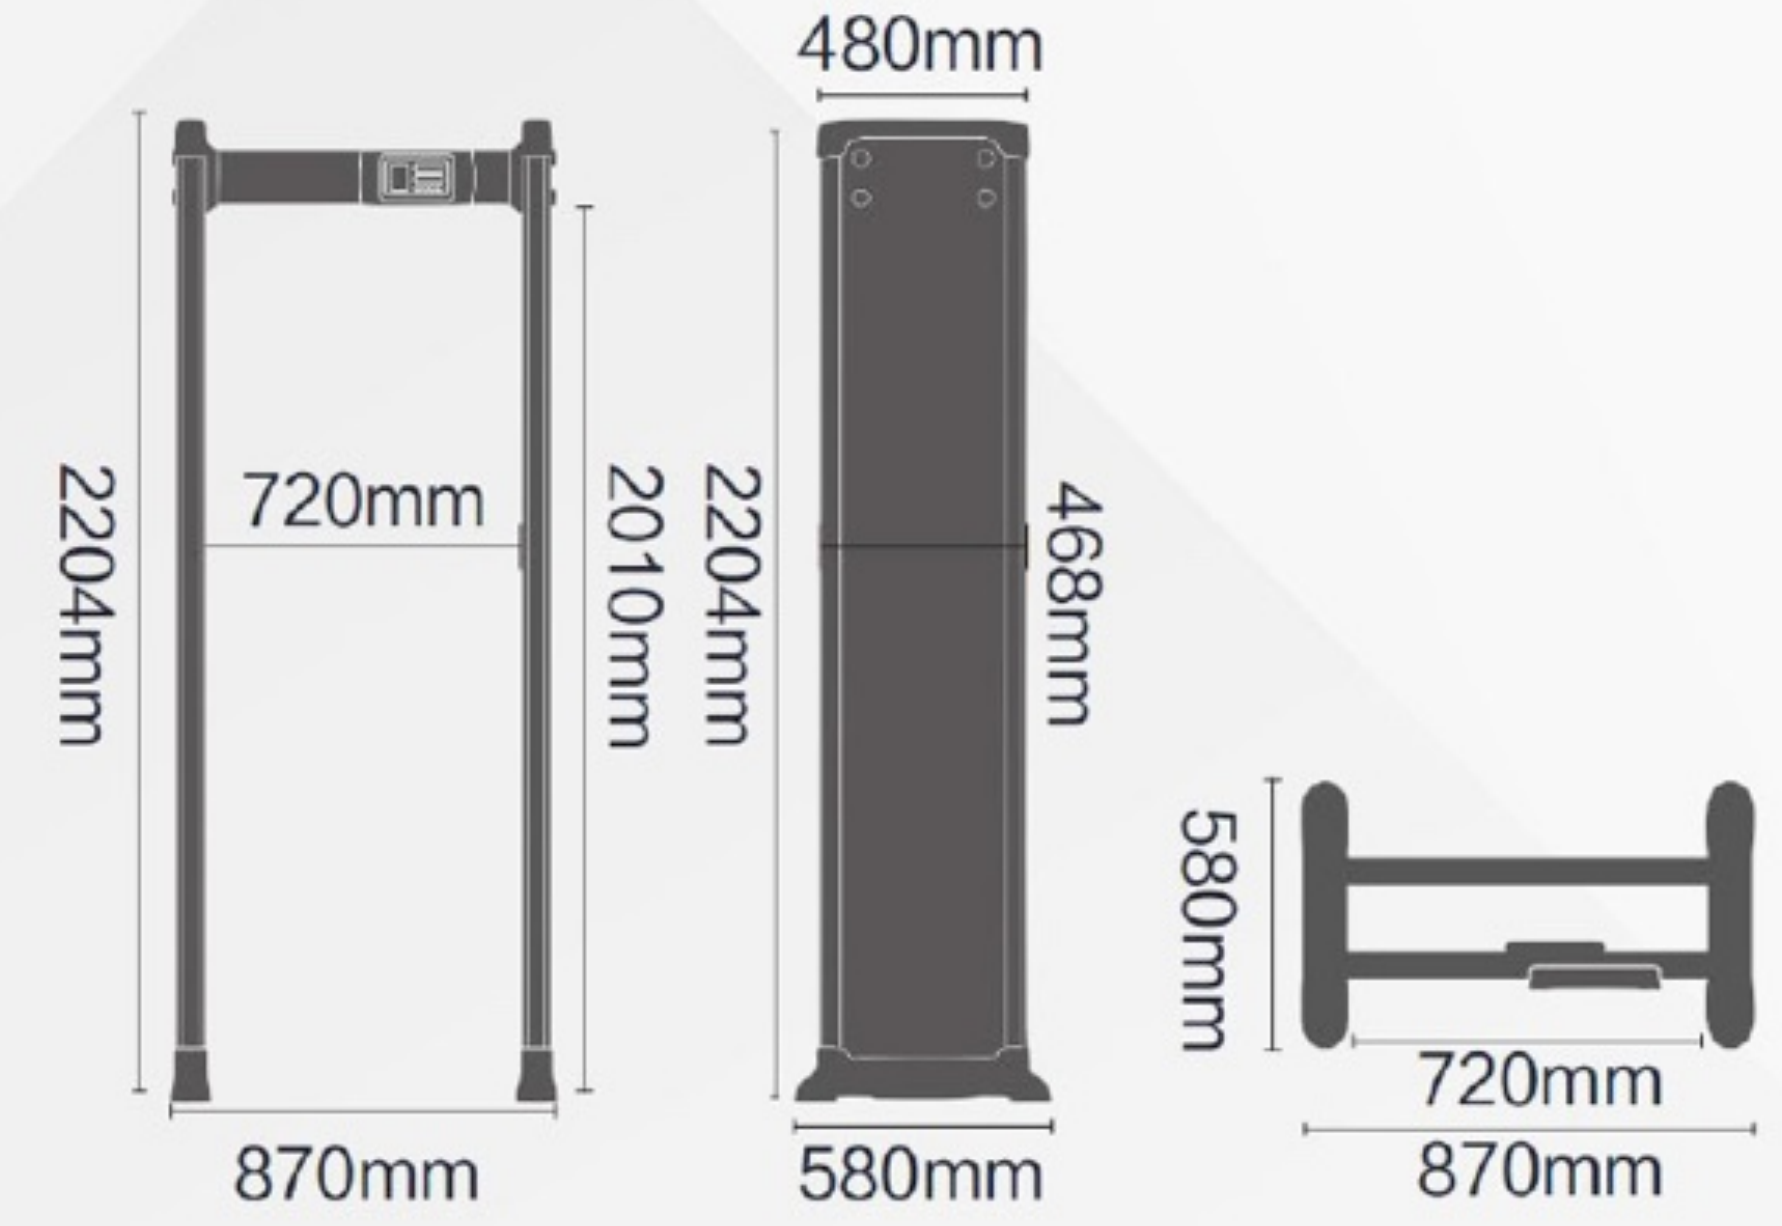

Function Configuration


Detection Zones	6-12-18 / 11-22-33 / 21-42-63 Zones
Pass Count	0-99999
Alarm Count	0-99999
Metal Detection Accuracy Range	One-dollar coin
User Interface	Dual sets of bright red and green digital tube display + integrated four-button panel operation mode
Password Protection Function	5-digit password protection
Operating Frequency	0-99
Security Level	0-99
Sensitivity Level	0-400
Alarm Volume	0-99
Alarm Tone	1-99
Alarm Time	1-99
Scene Setting	72 preset scenes
Infrared Setting	0-Both groups OFF 1-Front group ON 2-Rear group ON 3-Both groups ON
Left and right LED Bars	Interchangeable
LED Alarm Bars	Front 2 groups
Simultaneous detection and alarm in multiple zones	2 Detection zones simultaneously alarm

Optional Functions:


The above zones can be equipped with the following functions

Turnstile Connection		
Networking Interfaces for Multiple Units		
Back up Battery : 4/8/16 Hours		
With optional functions		No optional functions
Front and Rear Panel Alarm LED Lights		
Secondary Development Port/Upgrade Port		

Interface Display

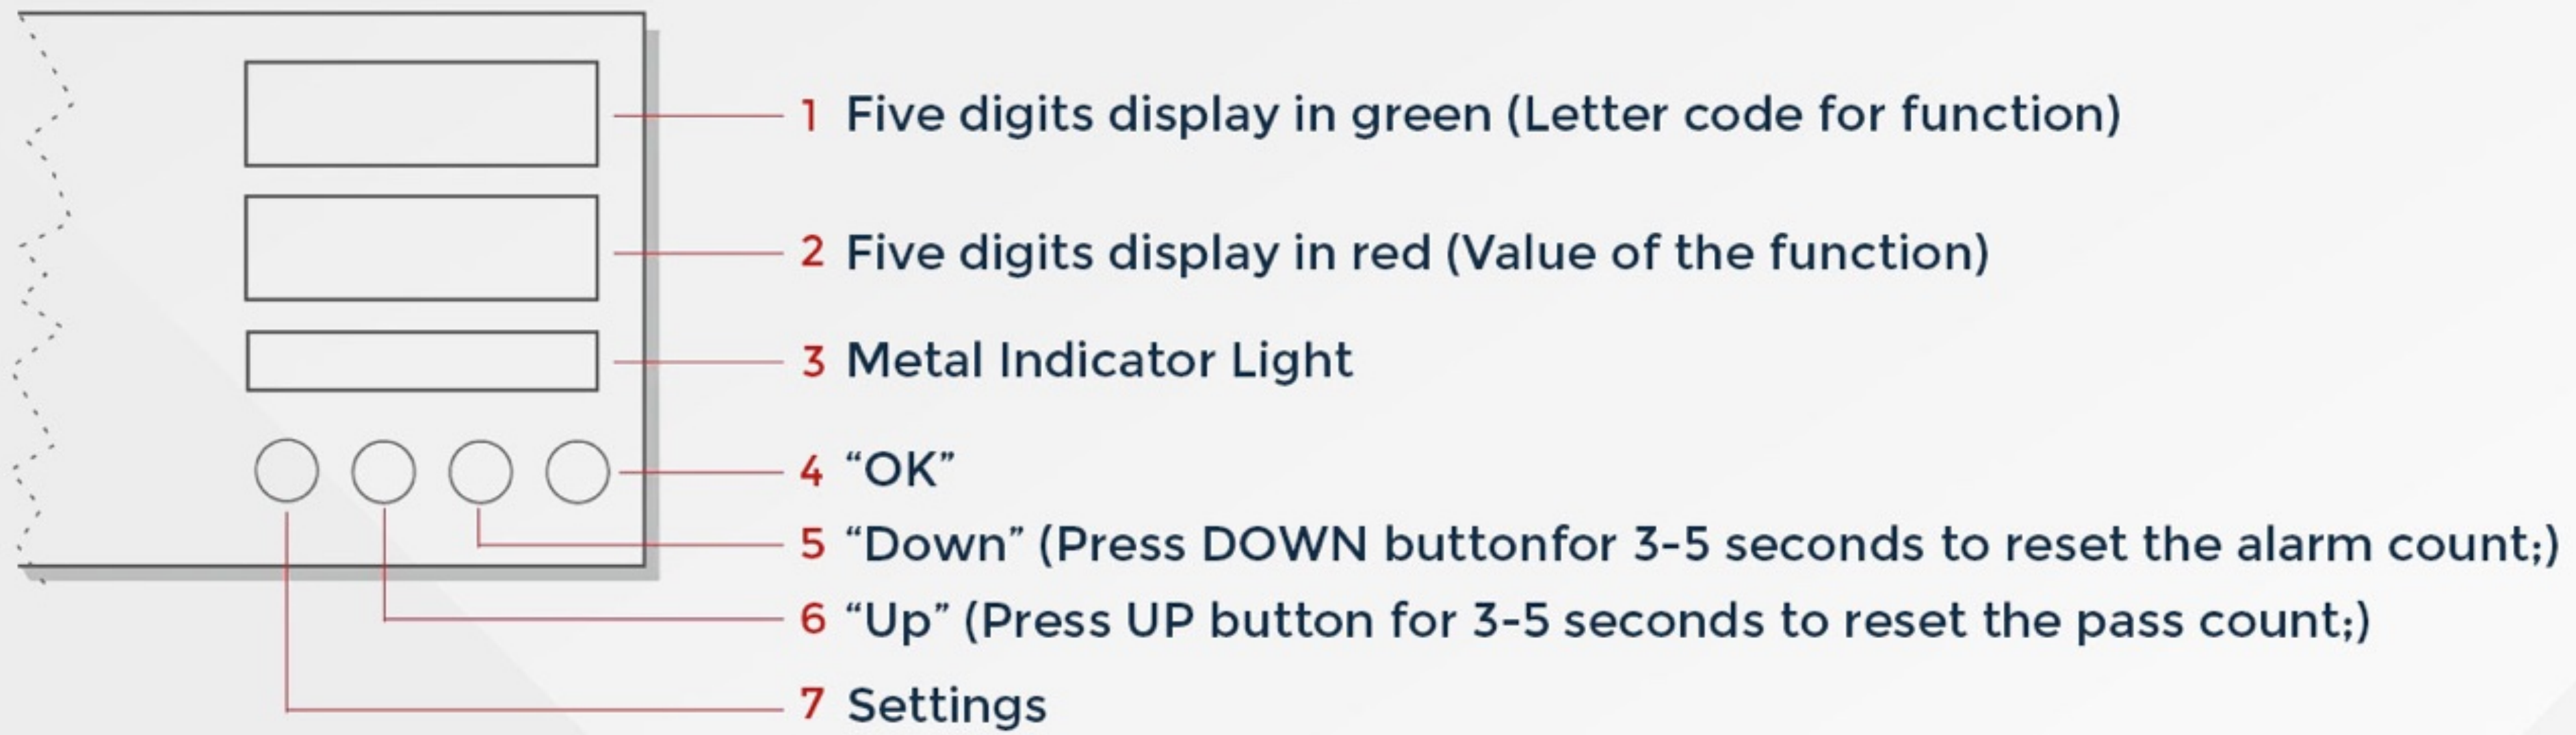


Anti-interference Reference Standard

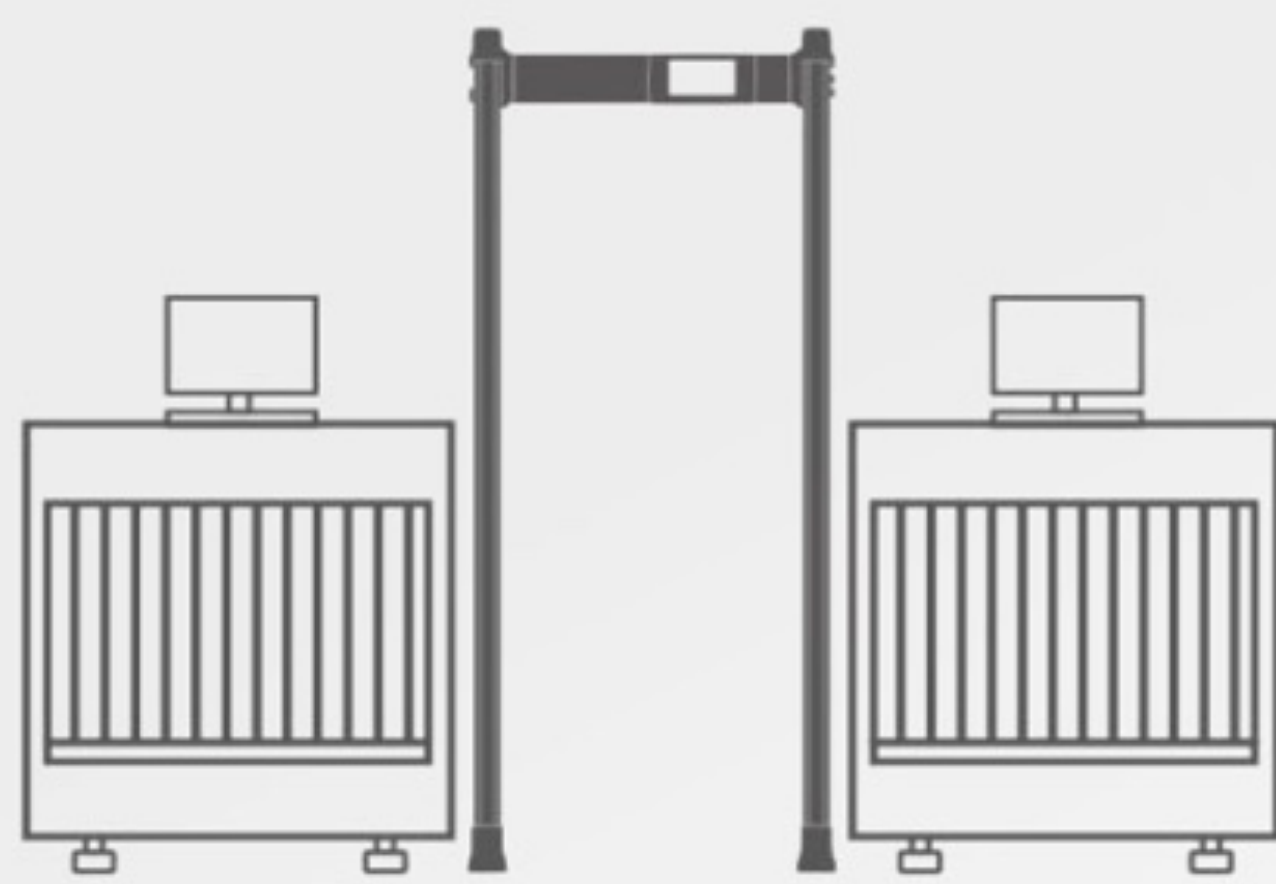

Keep ≥ 80 cm from the X-Ray machine




Keep ≥ 50 cm between two units

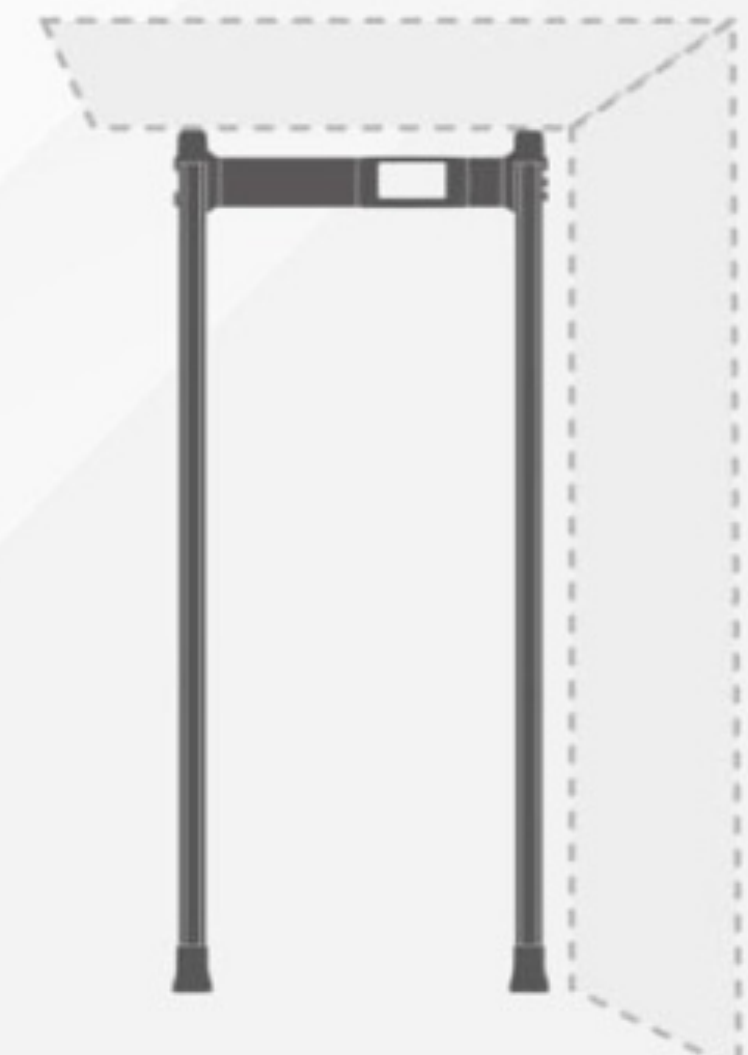


Keep ≥ 10 cm from the wall

Note: The above distances are for reference only, and the actual distances shall be subject to the performance accuracy of on-site debugging; the higher the sensitivity, the greater the distance interval, and the lower the sensitivity, the smaller the distance interval.

Test Kits

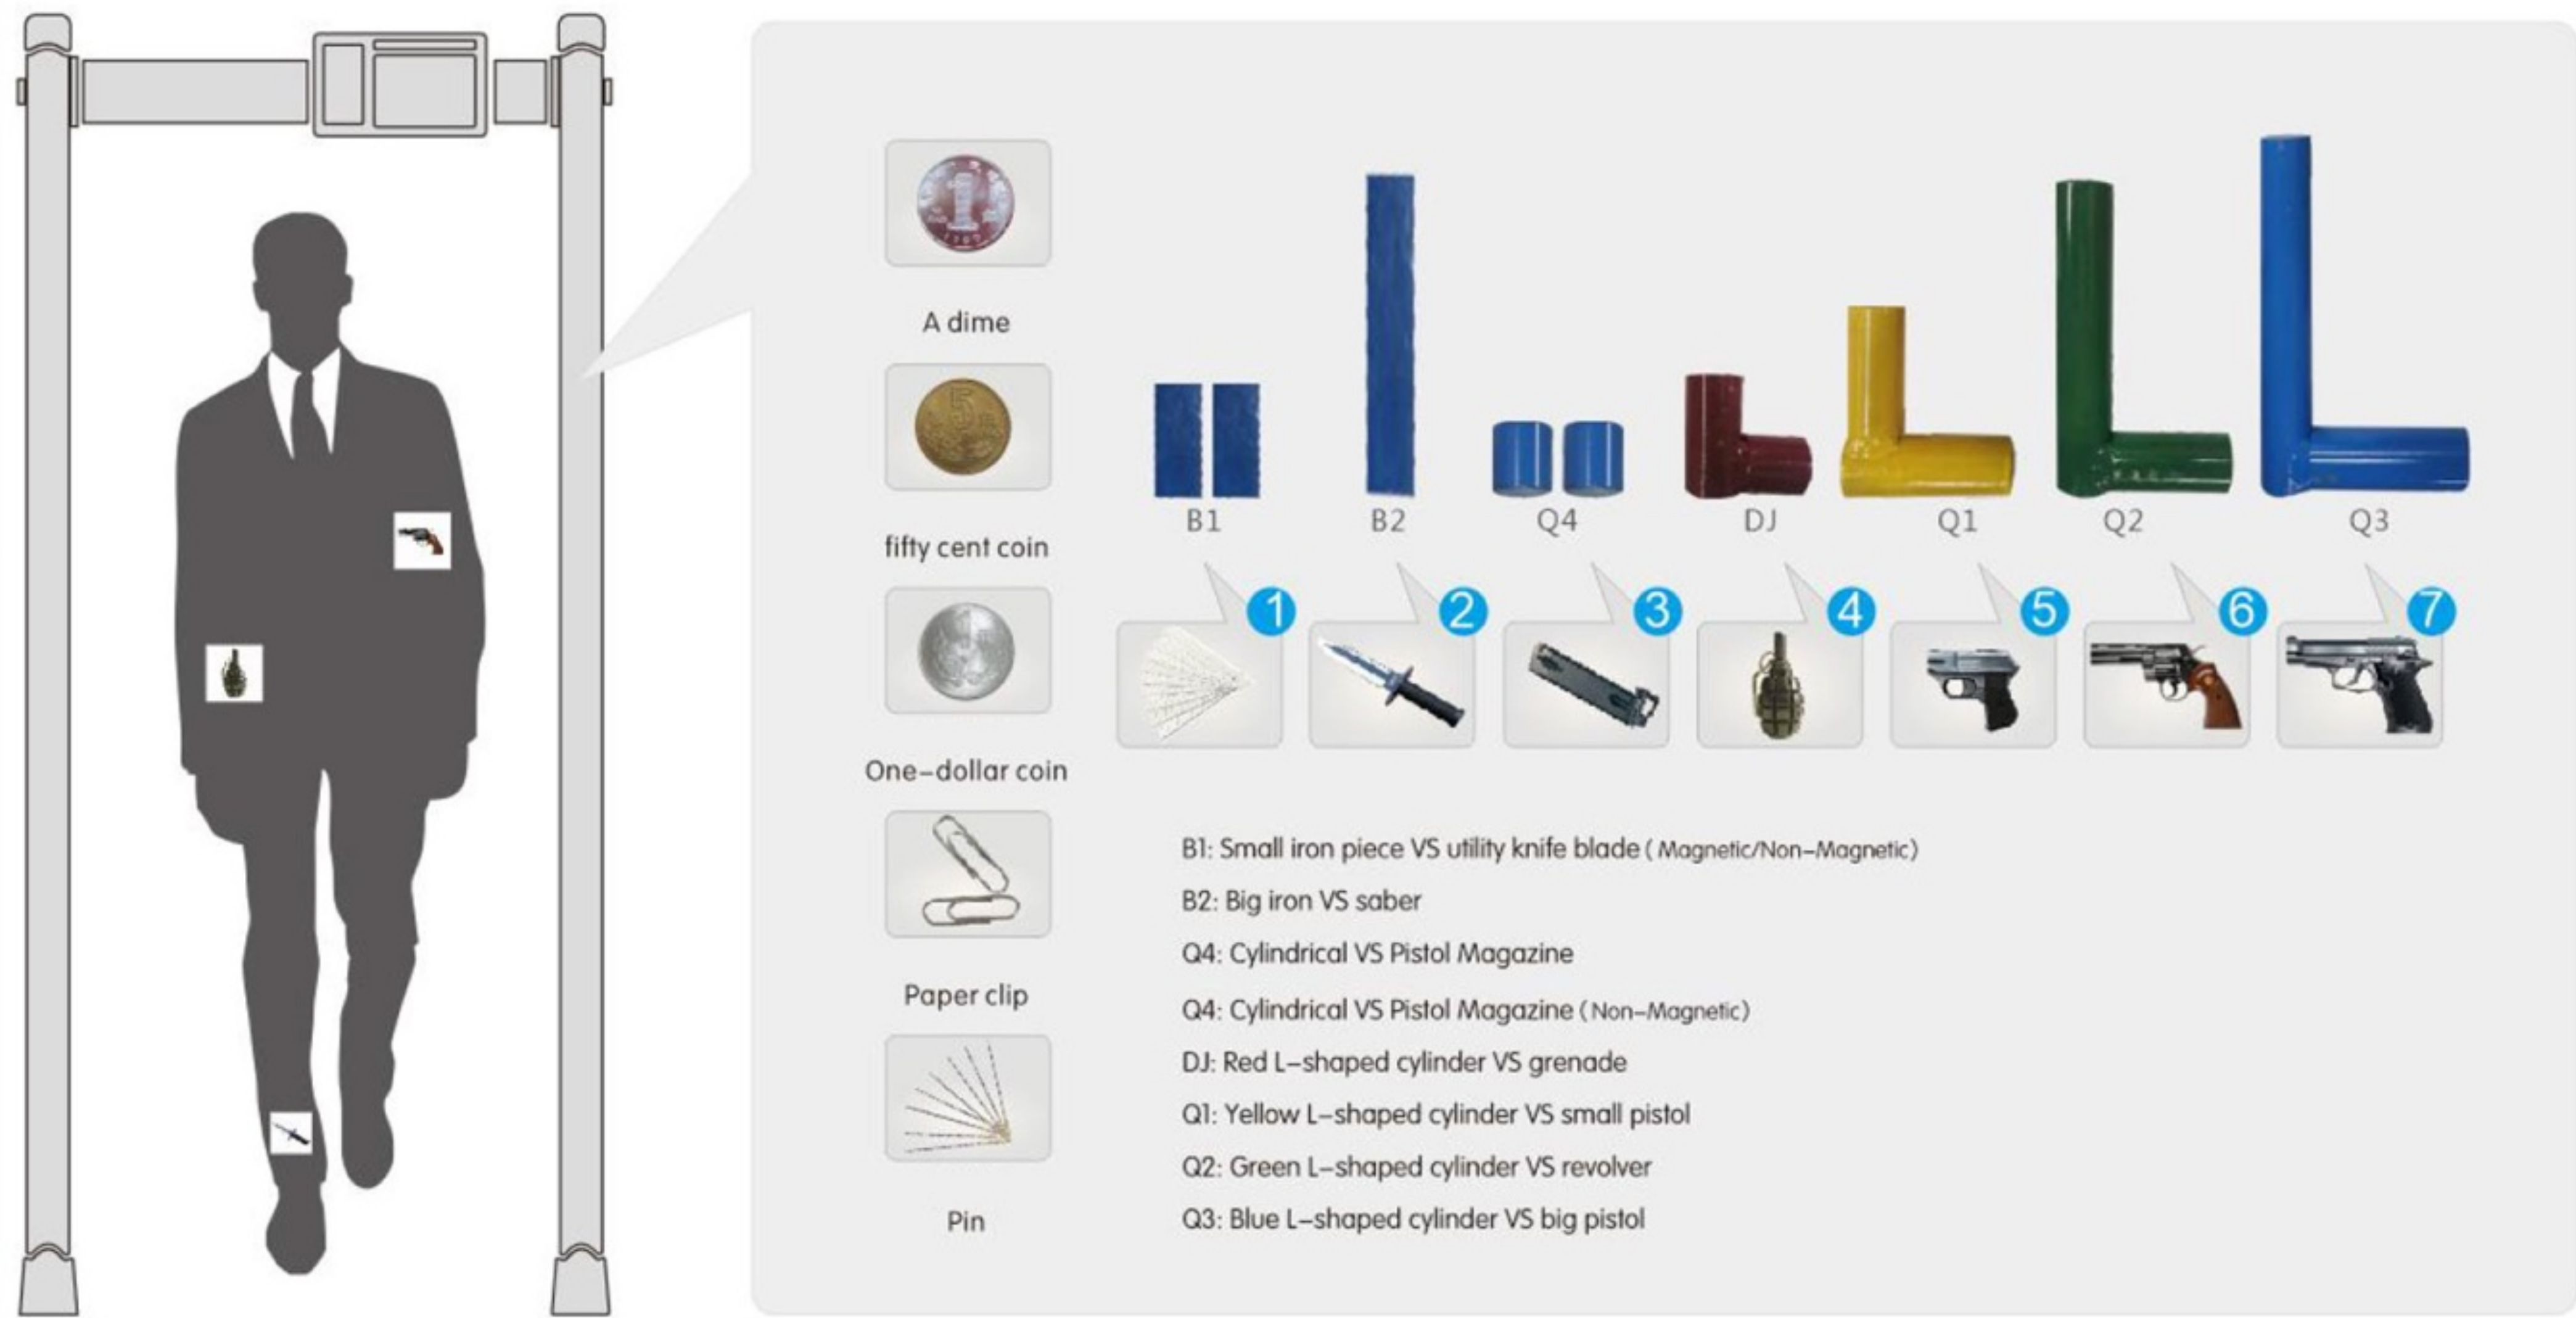

Detection Zone

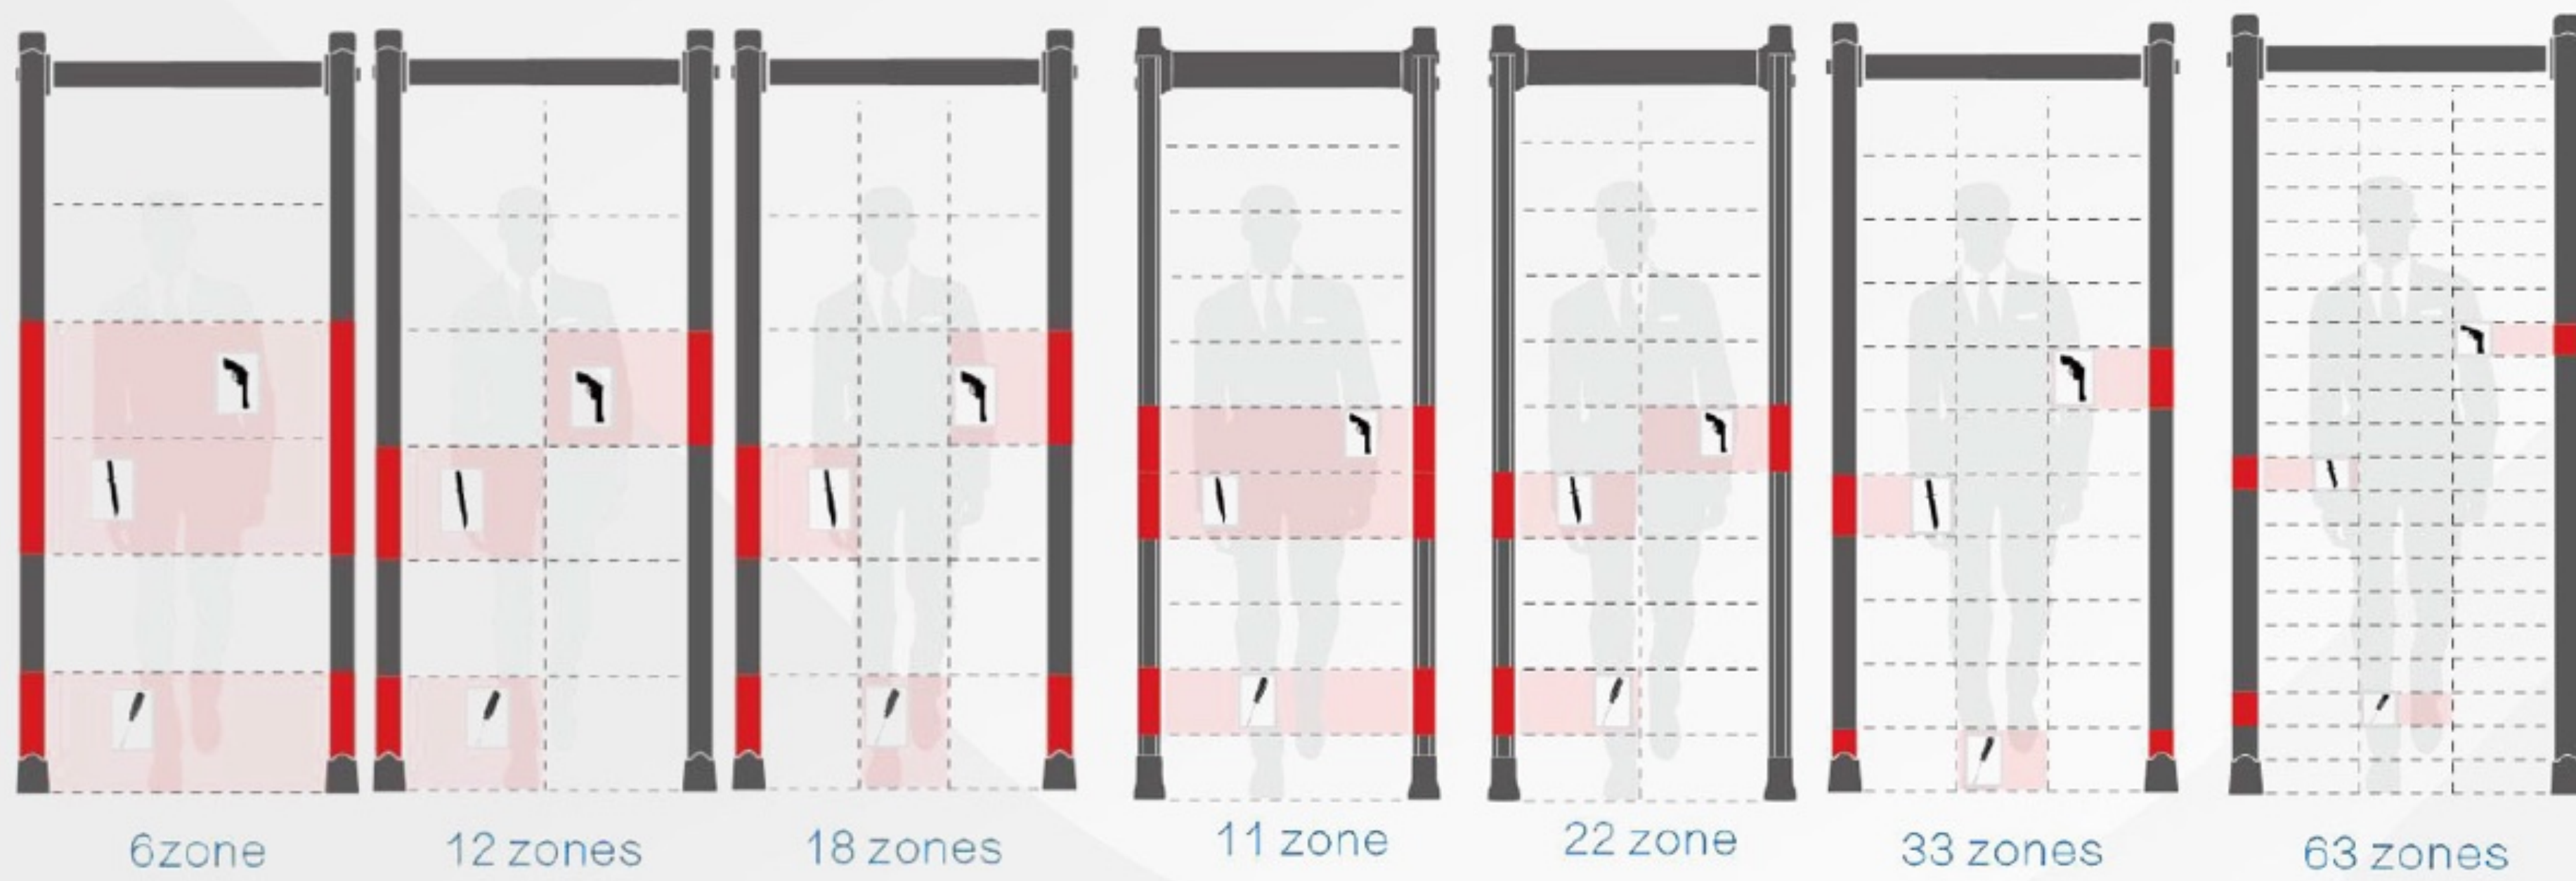

Package

Packaging	Carton box
Packaging Size	L2290xW740xH210mm
Volume	0.28m ³
Net Weight	42kg
Gross Weight	48kg

