

Product Model: PL 128

Made in
Türkiye




TWO-CHANNEL

SINGLE CHANNEL

- 1- Reasonable and reliable design, low noise, smooth operation and long service life
- 2- Equipped with power-off and pole dropping function, remote control can also be added for pole dropping control
- 3- LED indicator, valid card showing green, illegal card showing red
- 4- Card can be set "with memory" or "without memory" functions
- 5- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set
- 6- Compatible with IC, ID card, scanning and face recognition;
- 7- With unified and standard external electrical interface to facilitate system integration
- 8- Extensible to realize access control, attendance, fees and other functions
- 9- Can be used outdoors completely, one machine can be used as a lane



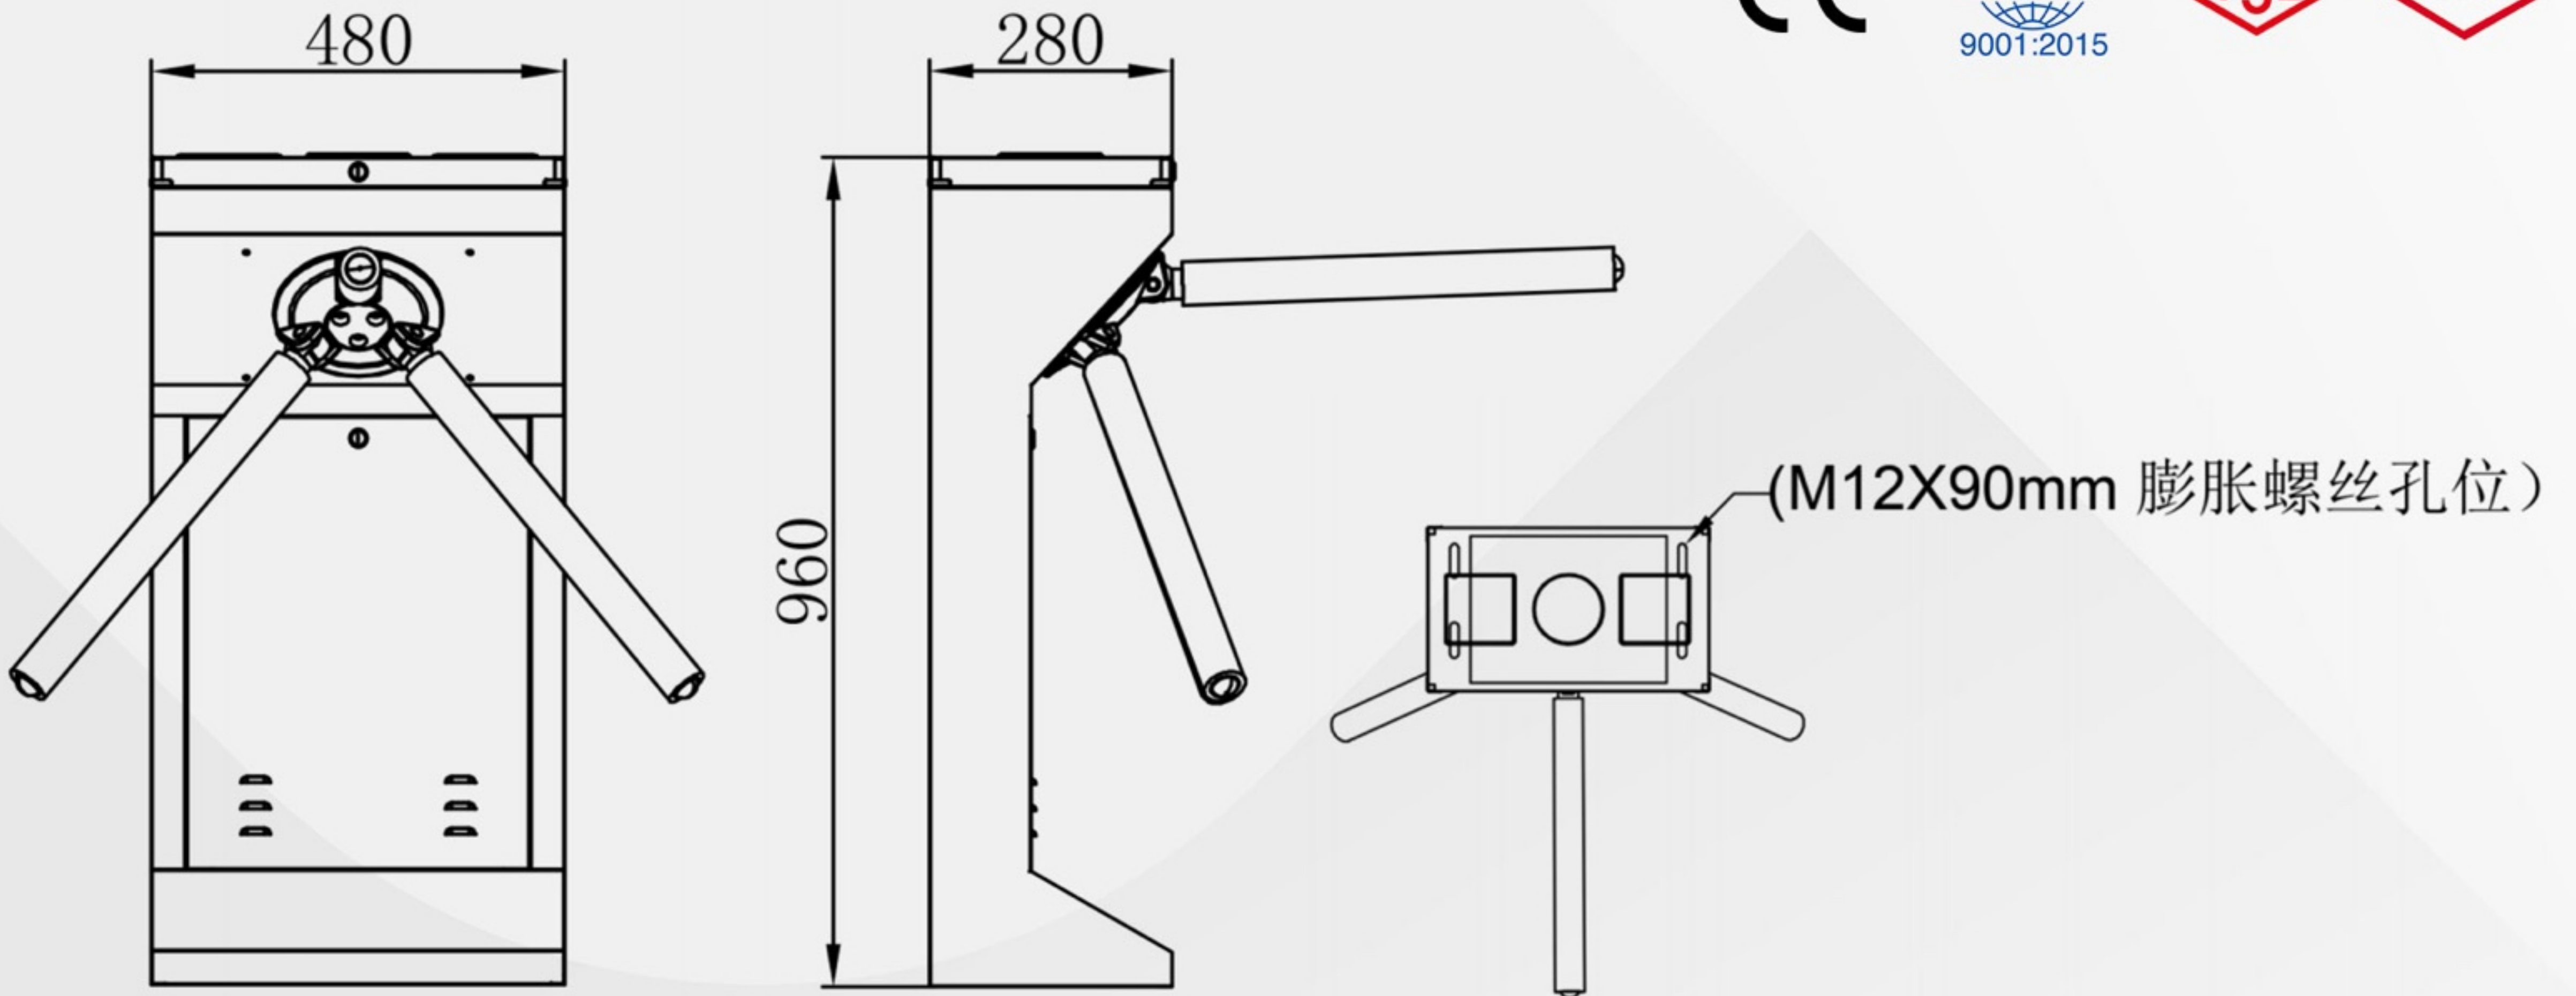

• Size (L*W*H)

• Pass Width

• Power

• Material

• Bar Material

• Movement

• Indicator Light

• Power Supply

• Control Unit

• Communication Interface

• Pass Rate

• Temperature

• Humidity

• IP

• Environment

• 480*280*960 mm

• 550 mm4

• 35W

• Top $\delta=1.2\text{mm}$ / body $\delta=1.0\text{mm}$ SUS304

• SUS201

• Semi-Auto Tripod Turnstile Movement With Anti-Pass Back Function

• Dynamic Indicator Light

• 24V 50W

• Main Board

• Dry Contact & RS485

• 35-50 Persons/Minute

• $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$

• $\leq 90\%$ No Condensation

• IP4X

• Indoor and Outdoor (Outdoor With Canopy)

