

Product Model: PL 148A

Made in
Türkiye




TWO-CHANNEL



SINGLE CHANNEL

- 1- Reasonable and reliable design, low noise, smooth operation and long service life
- 2- Equipped with power-off and pole dropping function, remote control can also be added for pole dropping control
- 3- LED indicator, valid card showing green, illegal card showing red
- 4- Card can be set "with memory" or "without memory" functions
- 5- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set
- 6- Compatible with IC, ID card, scanning and face recognition;
- 7- With unified and standard external electrical interface to facilitate system integration
- 8- Extensible to realize access control, attendance, fees and other functions
- 9- Can be used outdoors completely, one machine can be used as a lane



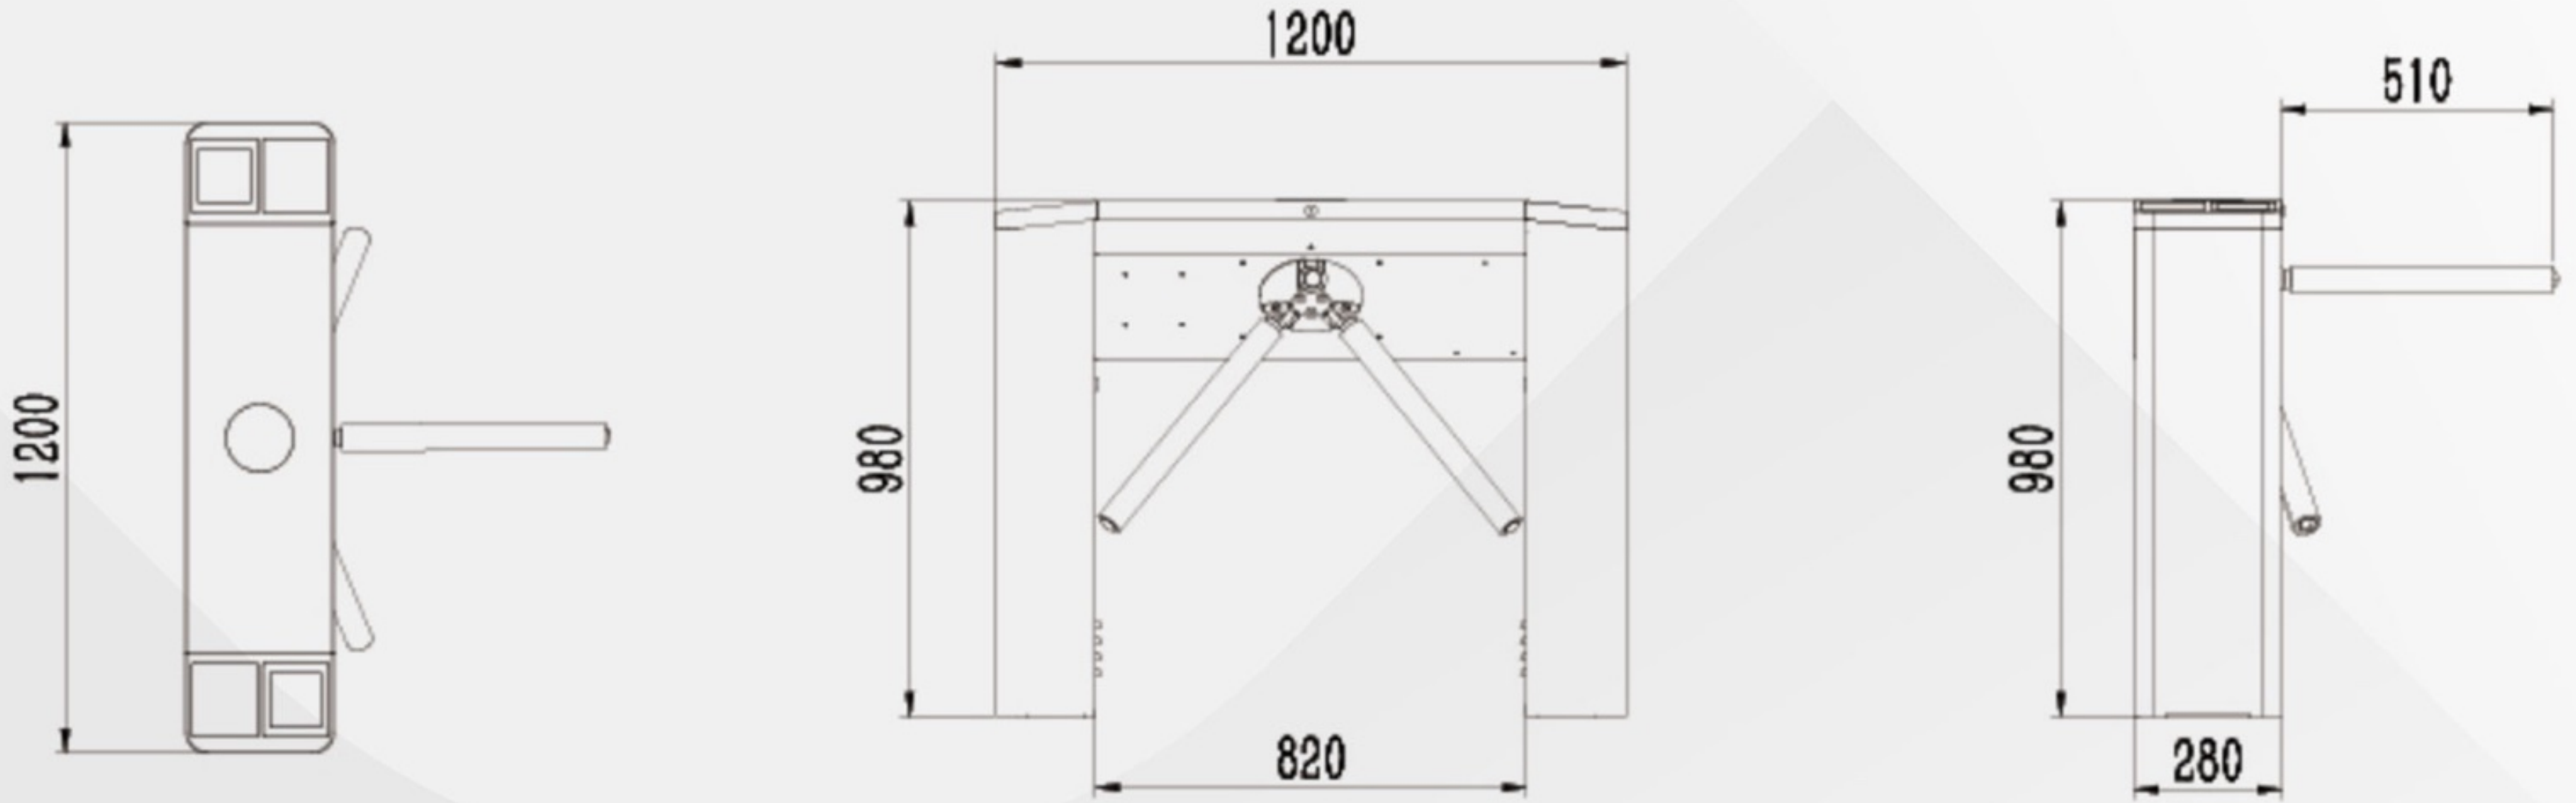

• Size (L*W*H)	• 1200*280*980 mm
• Pass Width	• 550 mm
• Power	• 50W
• Material	• $\delta=1.2$ SUS304
• Bar Material	• SUS201
• Movement	• Semi-Auto Tripod Turnstile Movement With Anti-Pass Back Function
• Indicator Light	• Dynamic Indicator Light
• Power Supply	• 24V 50W
• Control Unit	• Main Board
• Communication Interface	• Dry Contact & RS485
• Pass Rate	• 35-50 Persons/Minute
• Temperature	• $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
• Humidity	• $\leq 90\%$ No Condensation
• IP	• IP4X
• Environment	• Indoor and Outdoor (Outdoor With Canopy)

