


Product Model: **PL 2012**

Made in
Türkiye




TWO-CHANNEL

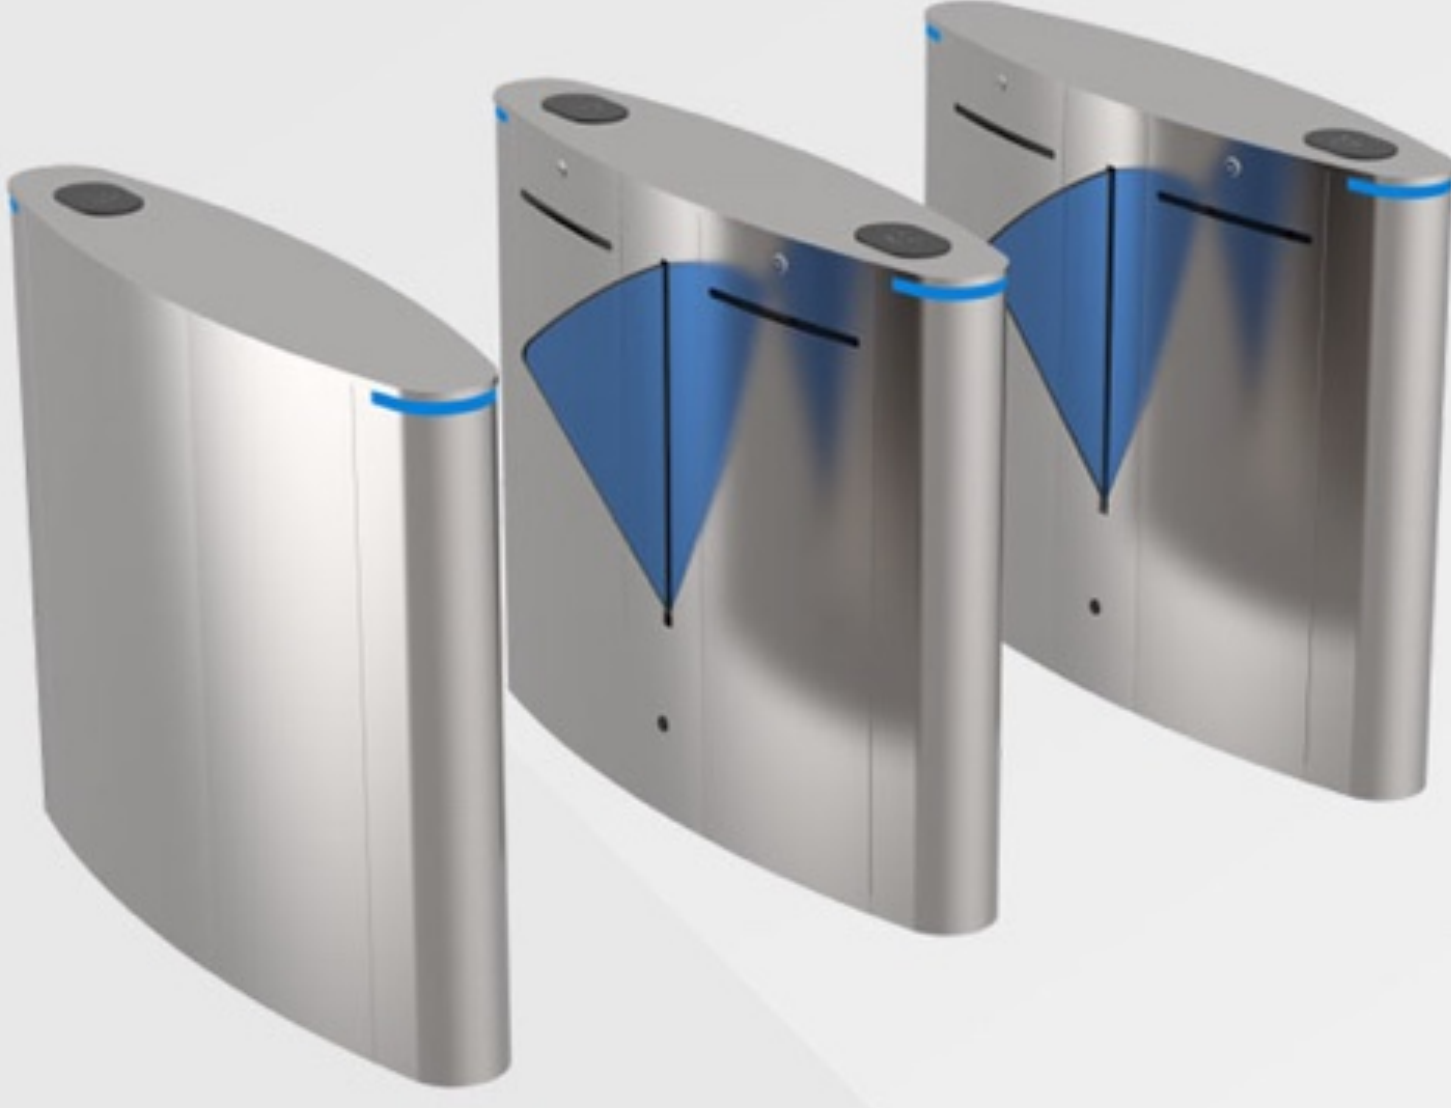

SINGLE CHANNEL

- 1- Reasonable and reliable design, low noise, smooth operation and long service life
- 2- With functions of anti-tail, anti-reverse pass and so on
- 3- Card can be set "with memory" or "without memory" functions
- 4- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set
- 5- With infrared anti-clip function (anti-clip when gate is open or running)
- 6- Compatible with IC, ID card, scanning and face recognition, etc.
- 7- Two modes of operation are available: open or closed.
- 8- Various working modes are available, including two-way card reading and one-way card reading, etc.



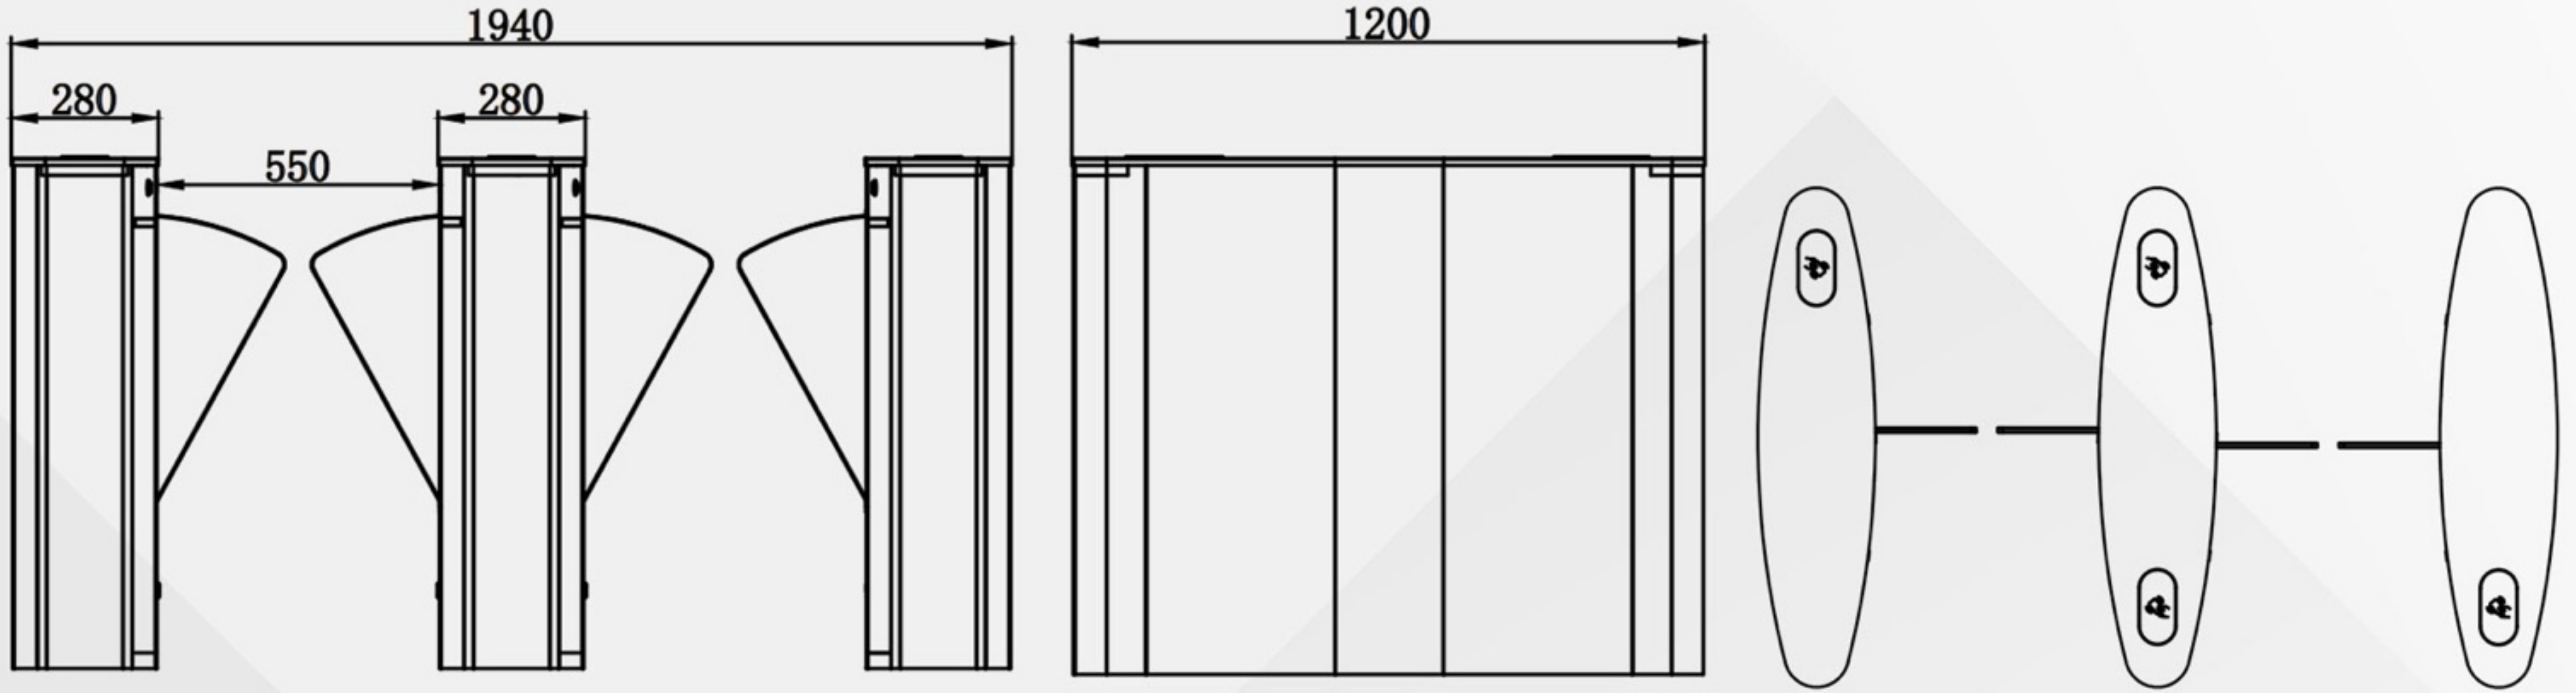

• Size (L*W*H)

• Pass Width

• Power

• Material

• Bar Material

• Movement

• Infrared Sensor

• Sensor

• Indicator Light

• Drive Unit

• Power Supply

• Control Unit

• Communication Interface

• Pass Rate

• Temperature

• Humidity

• IP

• Environment

• 1200*280*980 mm

• 550 mm

• 50W

• Top $\delta=2.0\text{mm}$ / body $\delta=1.2\text{mm}$ SUS304

• Blue PC Arm

• Brushed Flap Barrier Gate Movement

• 5 Pairs

• Limited Sensor

• RGB Light

• Brushed DC Motor 40K 30W

• 24V 150W

• Main Board

• Dry Contact & RS485

• 35-50 Persons/Minute

• $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$

• $\leq 90\%$ No Condensation

• IP4X

• Indoor and Outdoor (Outdoor With Canopy)

