

Product Model:

668 WA

Cross-Beam Waterproof Control Box



Sensitivity Adjustable



Led Display



High Precision



Password Protection



Led Light Indicator



Waterproof



Volume Adjustable



Modular Design



Pc Networking



Width Customizable



Ups Battery




Access Control Connection

- 1- Function of displaying environmental monitoring data
- 2- High performance, high sensitivity and high stability
- 3- Optional networking function, multiple devices can be managed through one PC
- 4- LED digital control box easy operation
- 5- IP65 waterproof for outdoor use
- 6- Comply with EMC electromagnetic radiation standards and adopt weak magnetic field technology, harmless to pacemaker wearers, pregnant women, floppy disks, film and video tapes


Conform to Electricity EN60950 Safety Standard
Conform to Radiation EN50081-1 Standard
Conform to Anti-interference EN50082-1 Standard

Made in
Türkiye

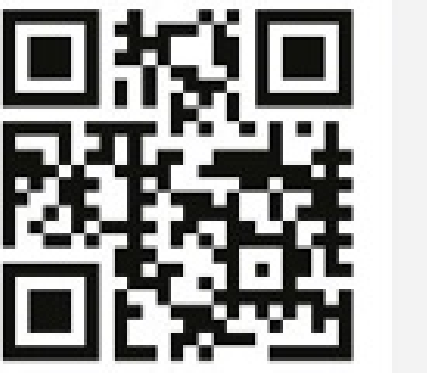

Product Specification

Overall Exterior Size	2204*865*780mm
Passageway Interior Size	2010*720*780mm
Operating Voltage	AC100V~240V 50/60Hz
Power	12W
Operating Temperatures	-20°C~65°C
Installation Environment	Width 100cm* Length 200cm (minimum range without metal) Sheet-like, horizontal orientation

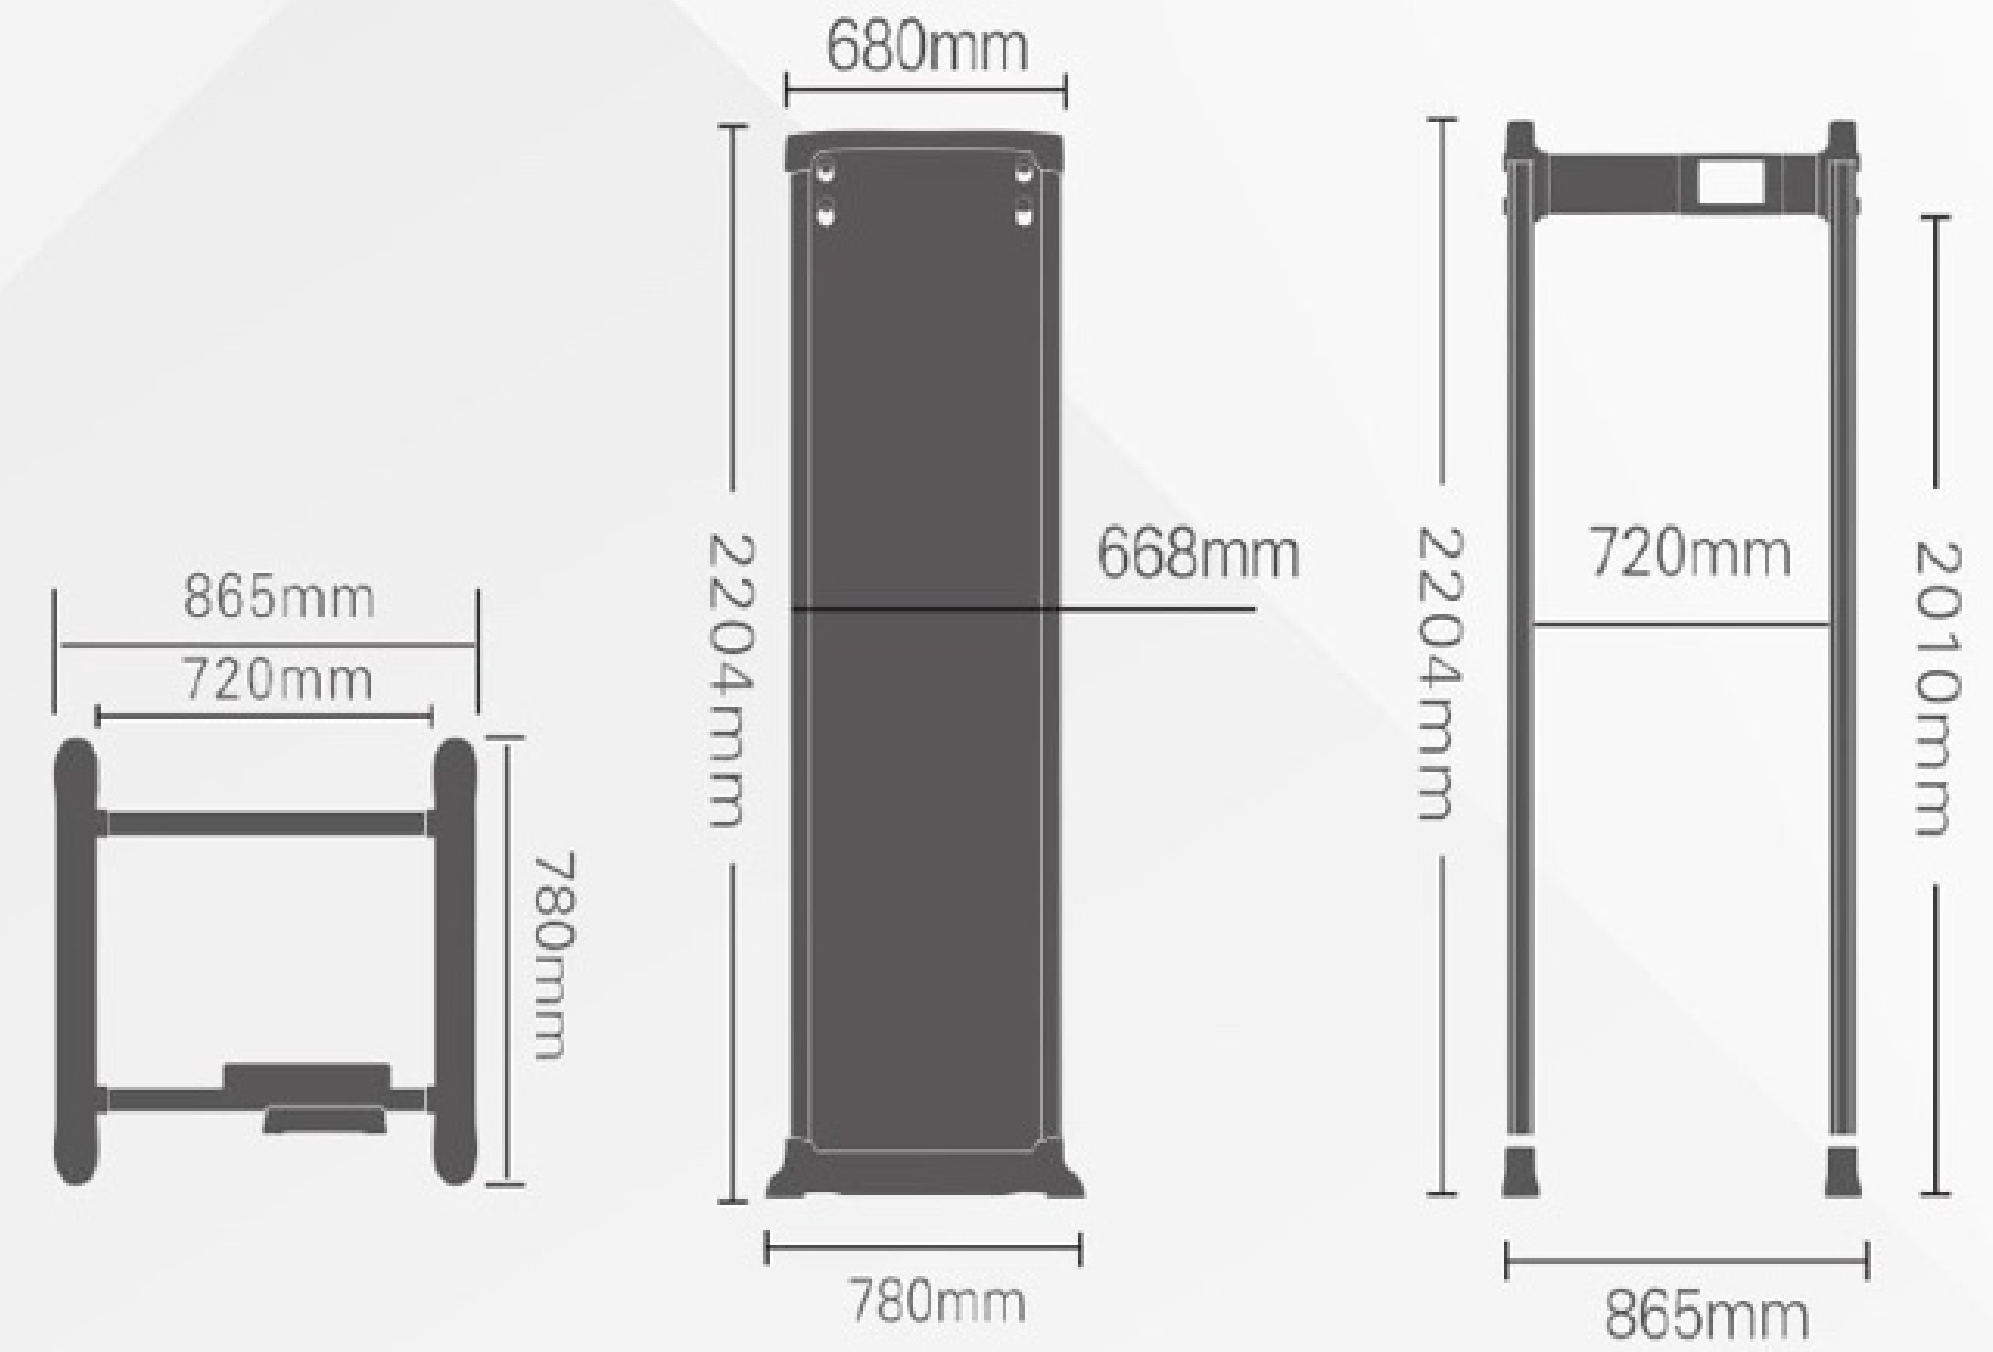

Function Configuration

Detection Zones	33 Zones	63 Zones
Pass Count	0-99999	0-99999
Alarm Count	0-99999	0-99999
Metal Detection Accuracy Range	One-dollar coin	One-dollar coin
User Interface	Dual sets of bright red and green digital tube display + integrated four-button panel operation mode	Dual sets of bright red and green digital tube display + integrated four-button panel operation mode
Password Protection Function	5-digit password protection	5-digit password protection
Metal Position Indicator	Intelligent zoning indication	Intelligent zoning indication
Operating Frequency	0-99	0-99
Security Level	0-99	0-99
Sensitivity Level	0-400	0-400
Alarm Volume	0-99	0-99
Alarm Tone	0-99	0-99
Alarm Time	0-99	0-99
Scene Setting	72 preset scenes	72 preset scenes
Infrared Setting	0-Both groups OFF 1-Front group ON 2-Rear group ON 3-Both groups ON	0-Both groups OFF 1-Front group ON 2-Rear group ON 3-Both groups ON
Left and right LED Bars	Interchangeable	Interchangeable
LED Alarm Bars	Front 2 groups	Front 2 groups
Simultaneous detection and alarm in multiple zones	2 Detection zones simultaneously alarm	2 Detection zones simultaneously alarm

Optional Functions:

The above zones can be equipped with the following functions

Turnstile Connection


Networking Interfaces for Multiple Units

Back up Battery : 4/8/16 Hours


Front and Rear Panel Alarm LED Lights

Secondary Development Port/Upgrade Port

Interface Display

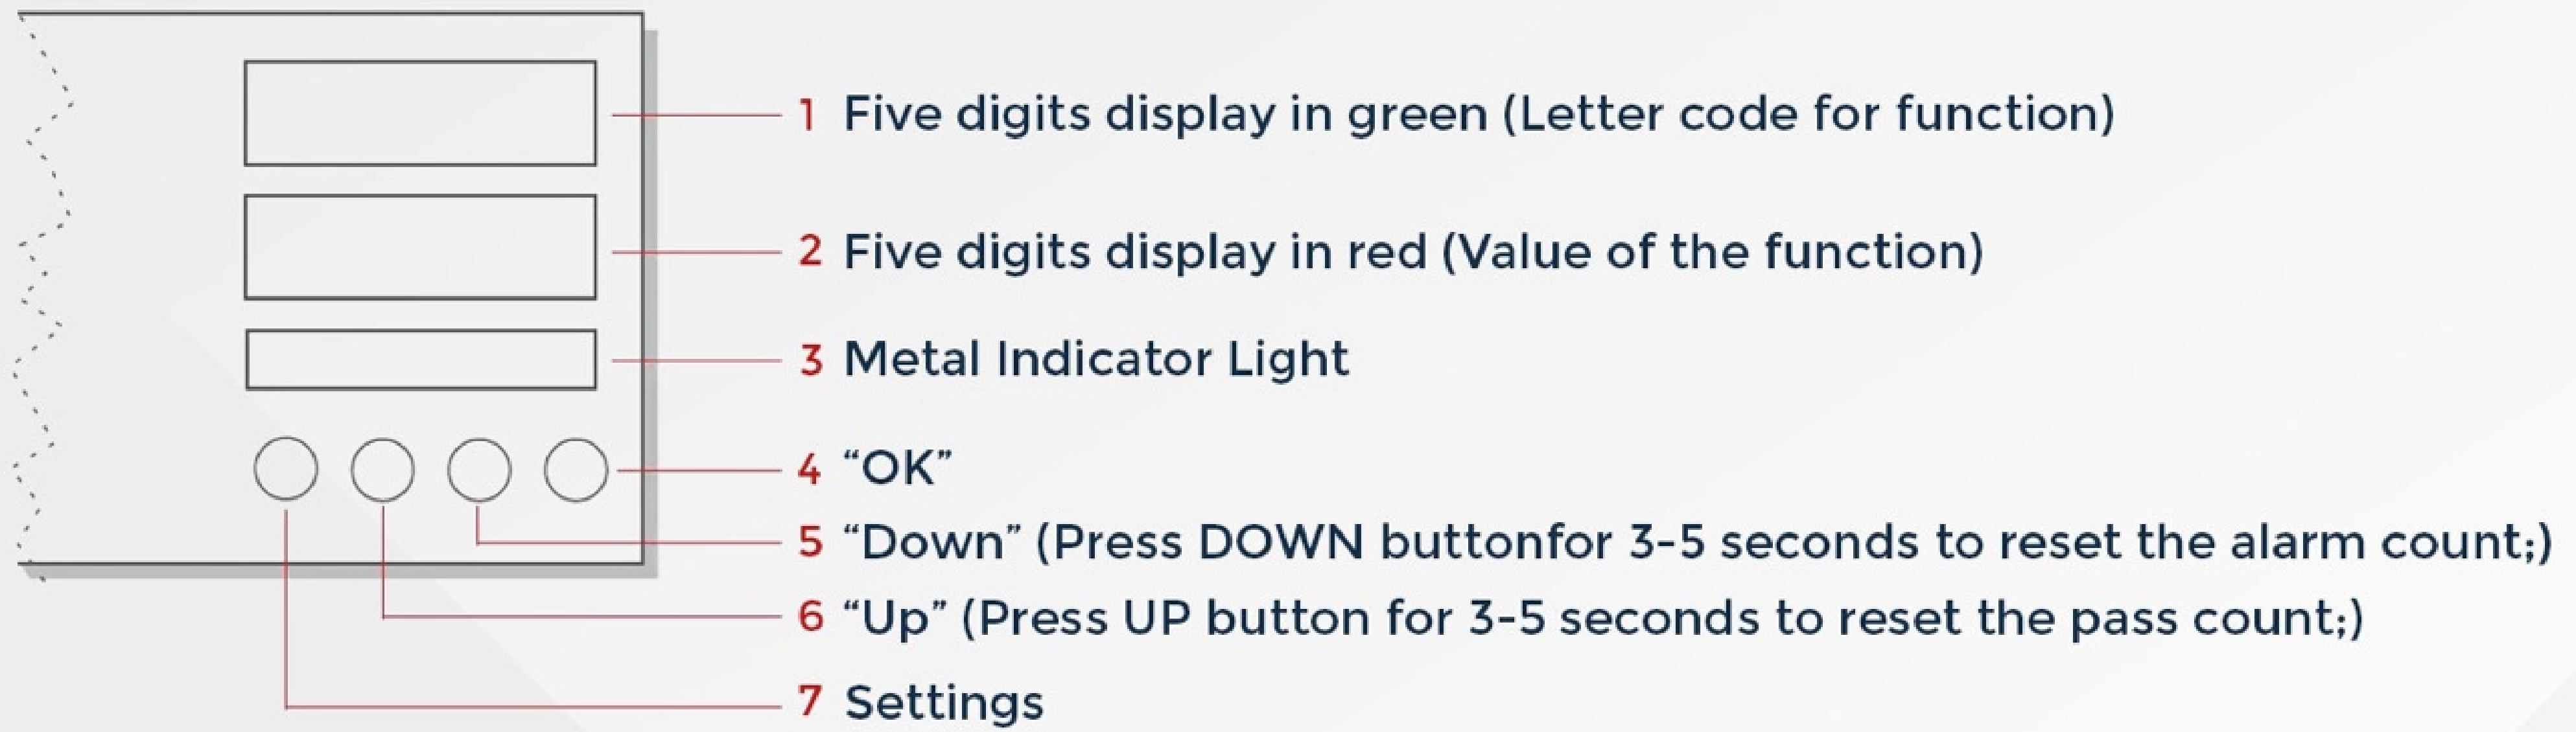

Anti-interference Reference Standard

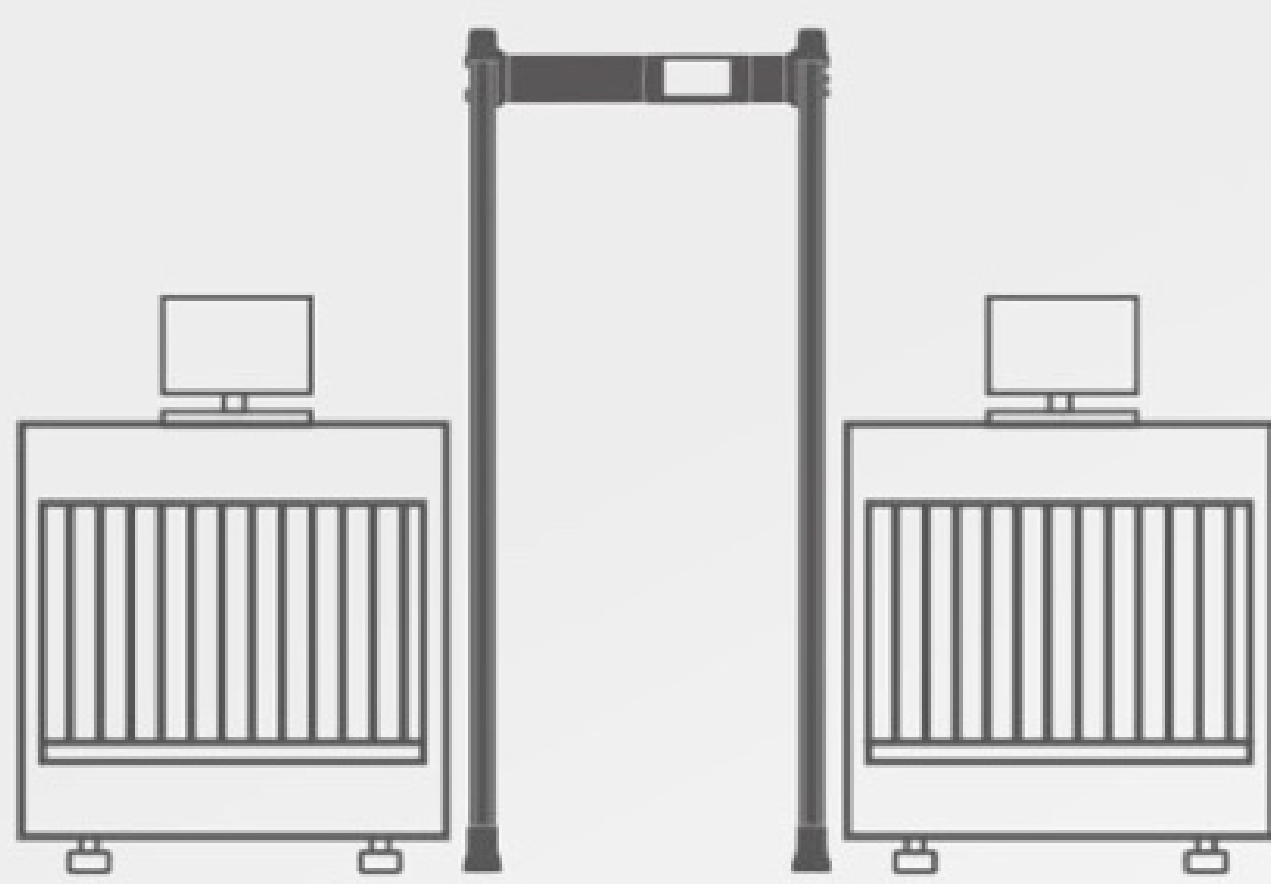

Keep $\geq 80\text{cm}$ from the X-Ray machine




Keep $\geq 50\text{cm}$ between two units




Keep $\geq 10\text{cm}$ from the wall

Note: The above distances are for reference only, and the actual distances shall be subject to the performance accuracy of on-site debugging; the higher the sensitivity, the greater the distance interval, and the lower the sensitivity, the smaller the distance interval.

Test Part Comparison Diagram

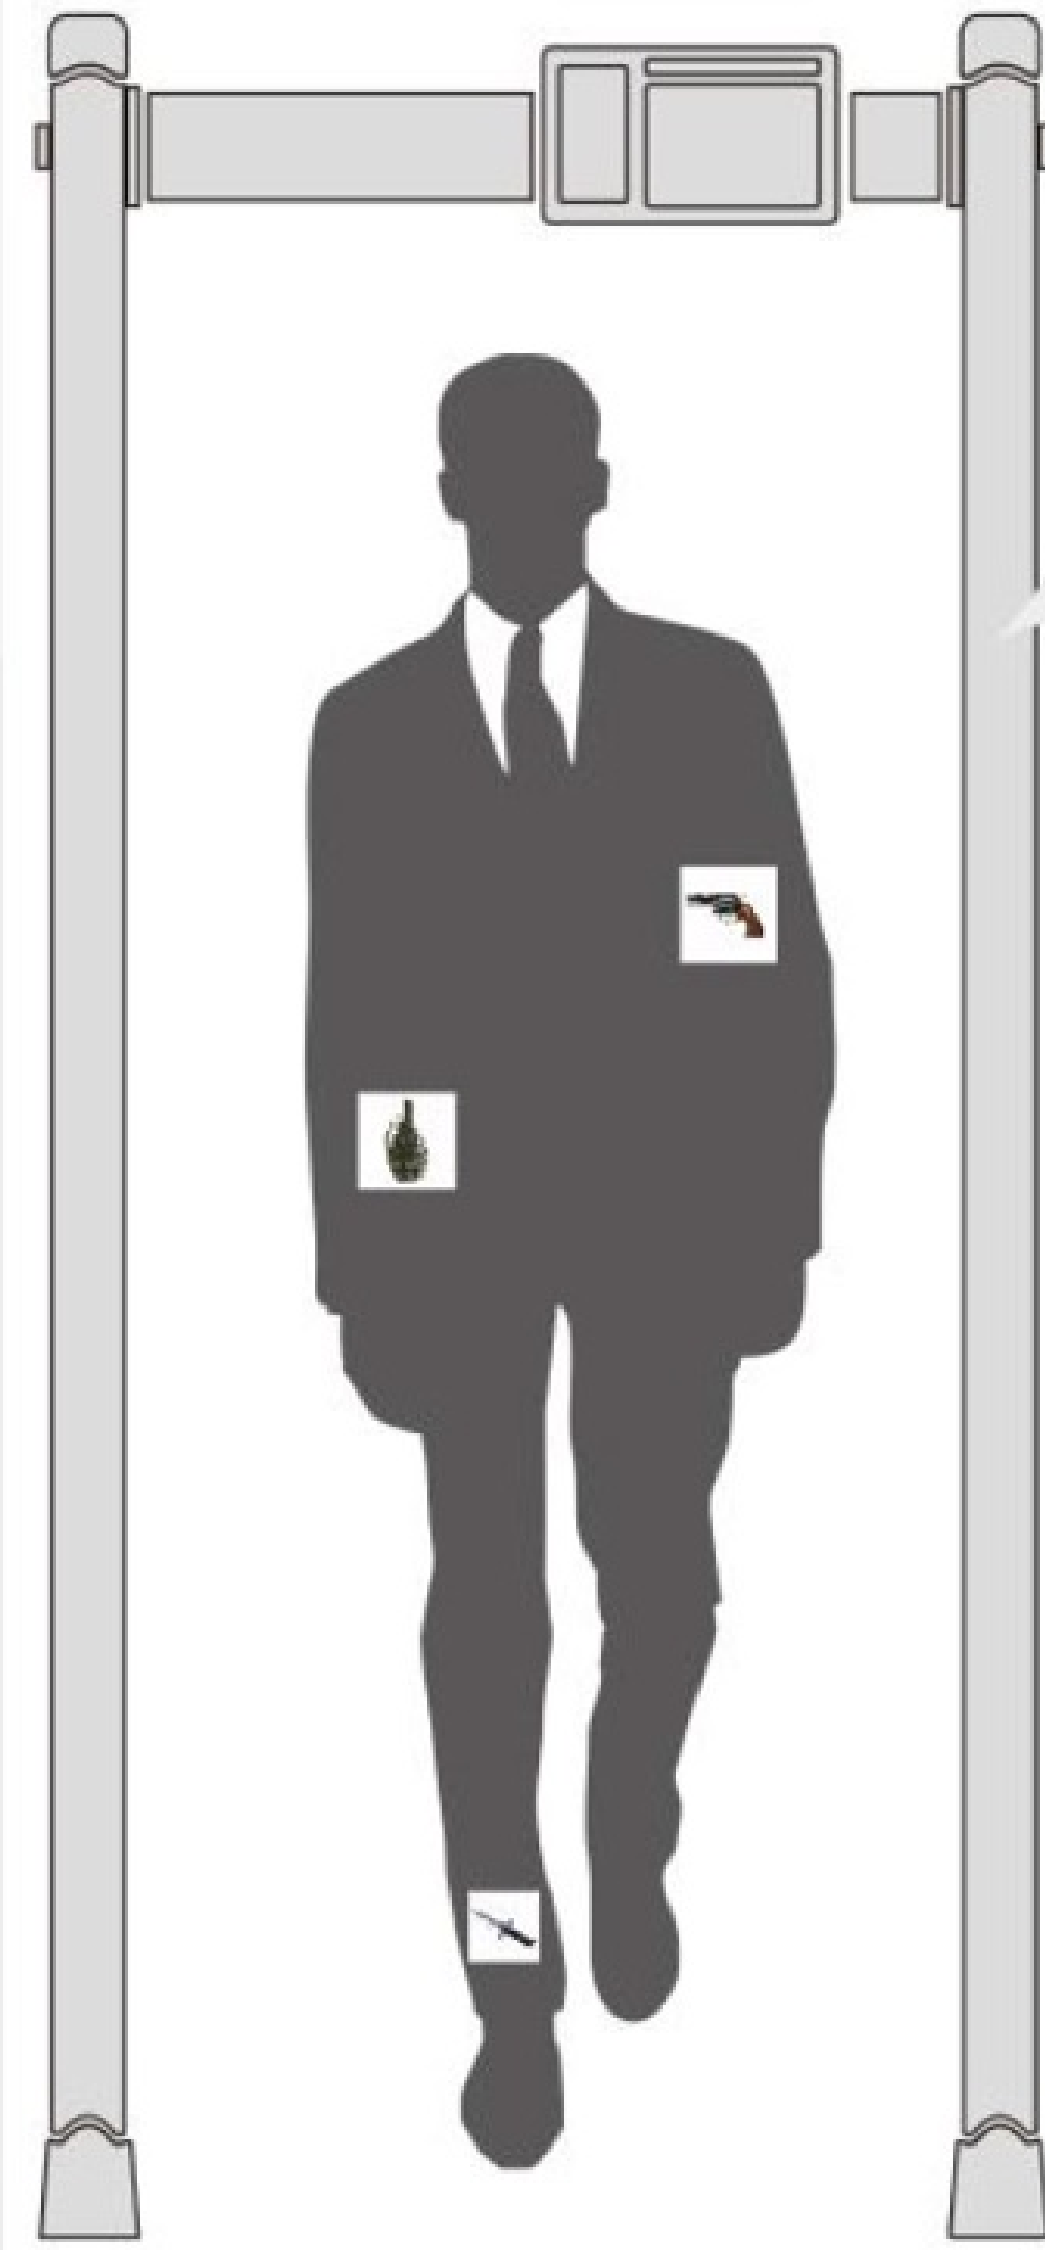

Location Display

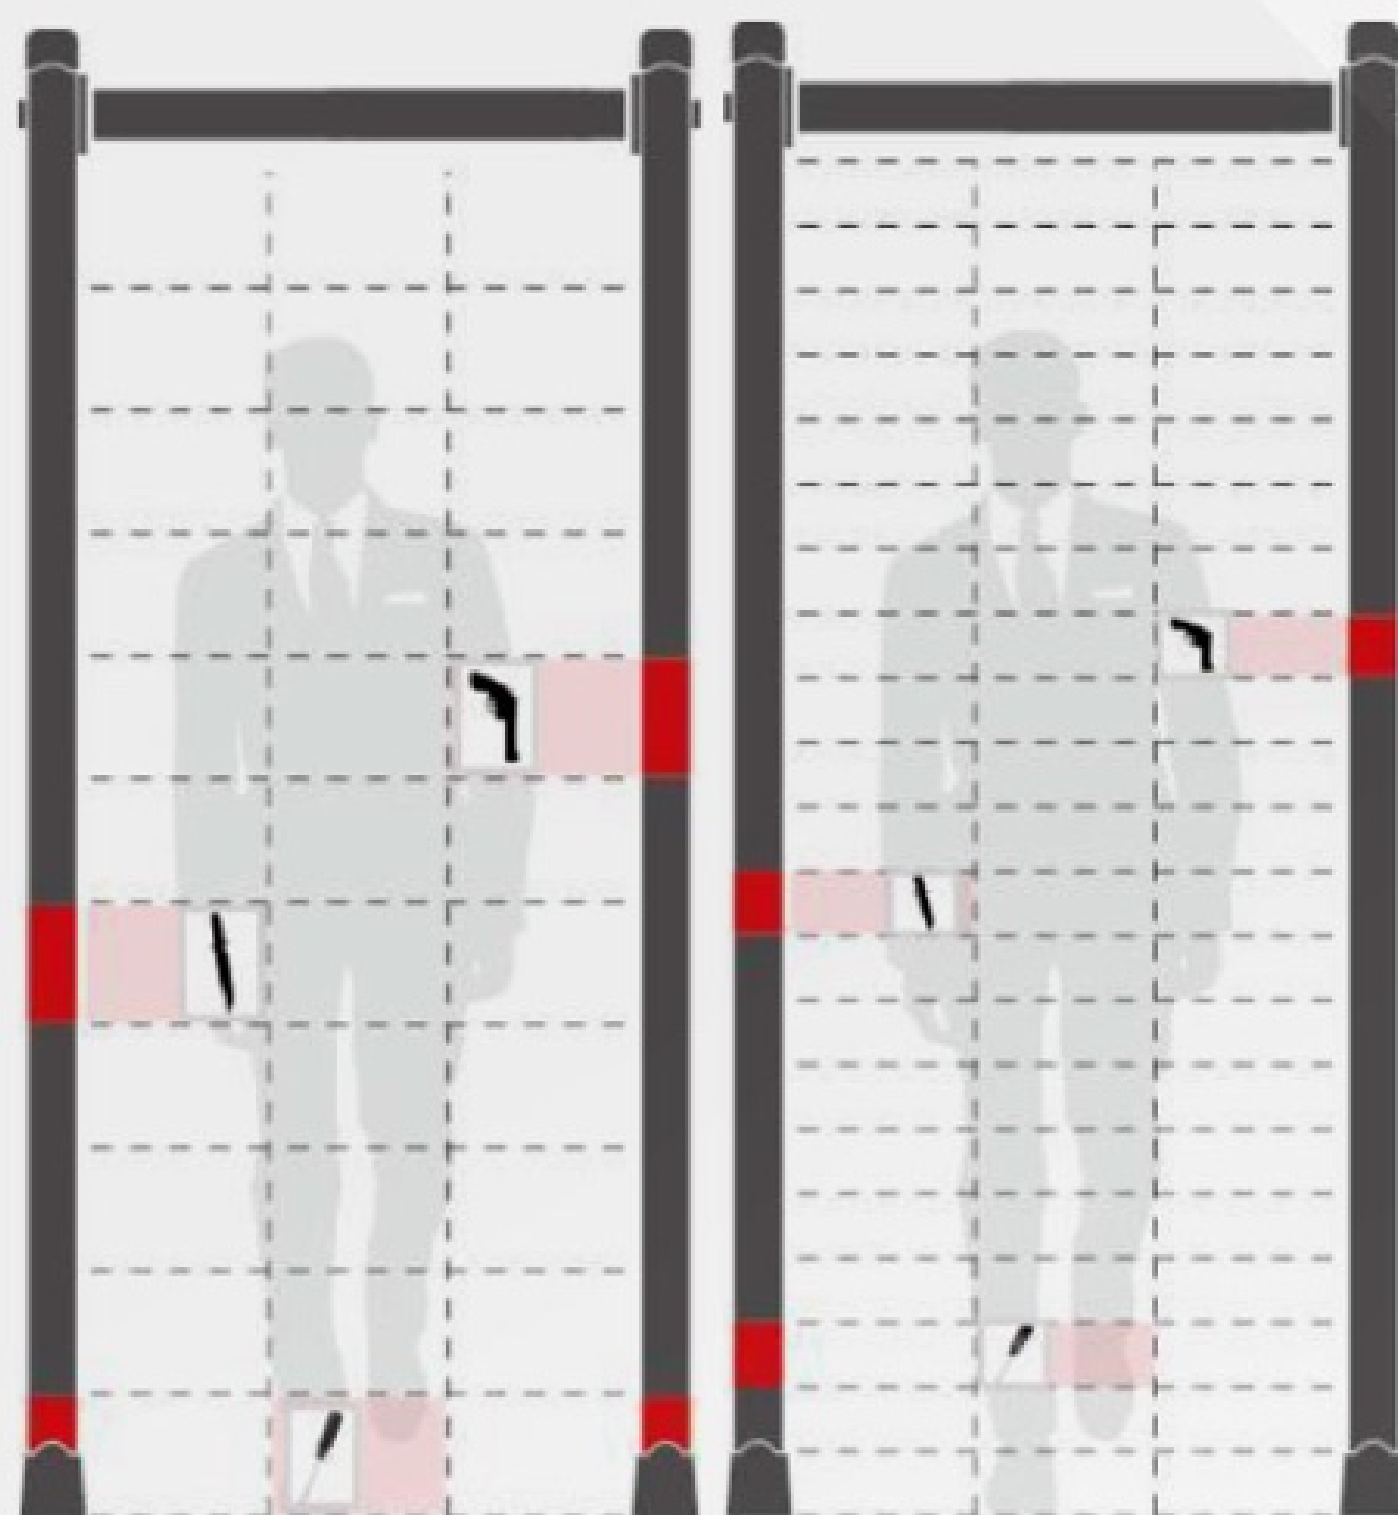

33 zones

63 zones

Package Display

Packaging	Carton box
Packaging Size	L2285xW1075xH215mm
Volume	0.528m ³
Net Weight	56 kg
Gross Weight	65 kg

