

Product Model :

SG L 100X100 C X-RAY BAGGAGE SCANNER




Product Highlights

- Patented Linux operating system
- * Patented compact cabinet design
- * Multilingual operation
- * Automatic built in test and self diagnosis
- * Secure access Key
- * Continuous working 10000 hours above
- * Threat alert and material classification
- * Network-Ready
- * Energy saving design
- * One key turn off
- * Drugs and explosives inspection
- * Indication of the date and time

Optional

- * Entrance & Exit real time surveillance cameras, with records to trace back potential suspect
- * Intelligent images analysis for knives, liquids and hard to penetrate items
- * Central server for optimized images sorting and judgment, remote management of 30+ terminal scanners

Dimensional Drawing

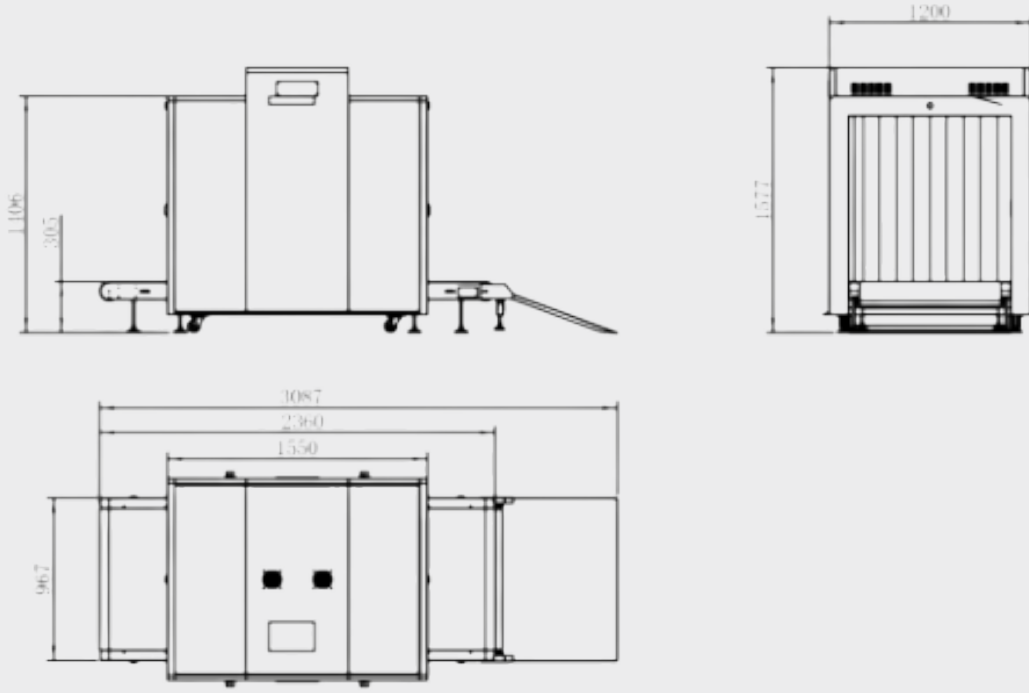

Important Sizes :

Product Size: 2 3 6 * 120 * 157.7 cm (L × W × H)

Tunnel Size: 1000*1000mm (width × height)

Compliance

Wire Resolution	Typical AWG 34
Penetration resolution	Typical AWG26
Spatial resolution	Vertical:1.3mm, horizontal:1.6mm
Penetration	Typical 2 5 mm
Resolution of organic matter	1-120mm
Grayscale and mixture resolution	1-40mm
Resolution of inorganic objects	0.2-10mm/
Effective material resolution	Meet the requirements of GB15208.1-2005
X-ray dosage each inspection	$\leq 2.5\mu\text{Sv (uGy)}$
Boundary Leakage	$\leq 1.0 \mu\text{Sv /h(uGy/h)}$
S/N ratio	<60dB
Conveyor speed	0.2m/s
Conveyor max load	200kg
Power consumption	1.0KW
Safety performance requirements	Meet the requirements of GB15208.1-2005
EMC requirements	Meet the requirements of GB15208.1-2005
Electrical safety	Meet the requirements of GB15208.1-2005
Environmental applicability	Meet the requirements of GB15208.1-2005

Compliance


Wire Resolution	Typical AWG 34
Penetration resolution	Typical AWG26
Spatial resolution	Vertical:1.3mm, horizontal:1.6mm
Penetration	Typical 2 5 mm
Resolution of organic matter	1-120mm
Grayscale and mixture resolution	1-40mm
Resolution of inorganic objects	0.2-10mm/
Effective material resolution	Meet the requirements of GB15208.1-2005
X-ray dosage each inspection	$\leq 2.5\mu\text{Sv (uGy)}$
Boundary Leakage	$\leq 1.0 \mu\text{Sv /h(uGy/h)}$
S/N ratio	<60dB
Conveyor speed	0.2m/s
Conveyor max load	200kg
Power consumption	1.0KW
Safety performance requirements	Meet the requirements of GB15208.1-2005
EMC requirements	Meet the requirements of GB15208.1-2005
Electrical safety	Meet the requirements of GB15208.1-2005
Environmental applicability	Meet the requirements of GB15208.1-2005
Leakage current	$\leq 5.0\text{mA}$

Film Safety	Guarantee ASA/ISO1600 Film
Weight	650kg
Operation temperature/Humidity	5°C-40°C/0%-90%
Storage temperature/Humidity	-20°C-60°C /10%-90%
Atmospheric pressure	86kPa-106kPa AC
Operation Power	220V(±10%-15%) 50±3Hz
Operation system	LINUX

General Specifications

X-ray generator	140KV, oil cooling, from top to bottom
Electric roller	Three- phase
System	Linux, operating 2G, storage 8G, hard disk 1T
Monnitor	21.5" LED screen, resolution: 1920*1080pixels
Operation console	Single screen console

Scanned images

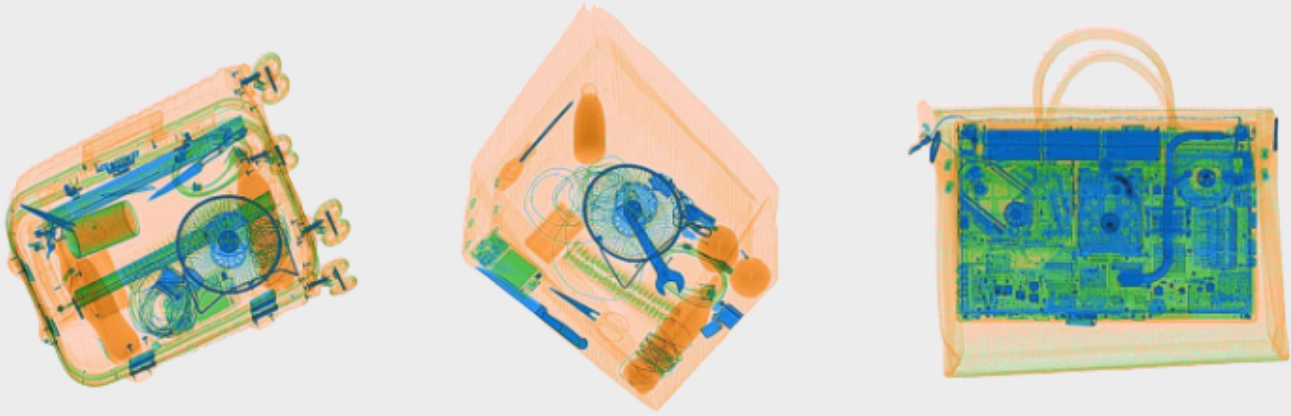

Product Details

Functional characteristics

Power-on self-test	With the function of fault self-check, automatically judge the fault and prompt the fault code information in time.
Image processing	With the function of Color/BW, negative, high/low penetration, organic /inorganic stripping, general enhancement, and pseudo color, etc.
Image Recall	30 preceding images recallable.
The number of images stored	Up to 10,000 images stored automatically.
Real-time curve	The real-time curve can be used to detect whether the acquisition system and components work normally.
Time setting	System time can be set
Probe setting	It can realize the manual deletion of the low and low energy detection board dead pixels, and display the deleted dead pixels in the display area.
Ray source setting	There are two source and analog source control modes, the source parameters of the digital source can be set.

Alarm system	The alarm function can be activated and deactivated, and the alarm type of the alarm box, sound and light alarm can be selected, and the sensitivity, minimum absorption rate, maximum absorption rate, and alarm duration can be set.
Troubleshooting	It can realize whether the components such as the entrance and exit light barrier, side panel switch, emergency
Image setting	stop switch and light source are normal, and display the standard value and current value of the detection voltage
Software registration	The drum running control direction and the image display moving direction can be set. It can realize software registration function and has serial number, registration code, registration status and system time information display.
User login	Log in by entering different user name and passwords, only when logging in can you make other settings.
User management	You can add, delete, edit the user name and password, set the user level to restore the deleted user.
Authority management	Different default permissions can be set according to user level.
Language settings	The system language can be set to switch between Turkish and English.
Log management	User operations can be monitored to query user actions.
About	The version and device number can be displayed.
TIP report	The report can be generated by the tip operation after the tip insertion function is turned on, and the content of the report: user name, number of tip insertions, number of tags, false positive rate, probability of detection, probability of false positives.

Tip management	It can be set to enable and disable the insertion of dangerous goods, and can set the identification time, Prompt time, insertion frequency, proportion of single items inserted into dangerous goods, add tip files and delete files.
Document management	It can query, open, and export the checked image.
Function setting	It can set log level, save the file time, whether to open the training function and setting the smart roller.
Data setting	Display system working hours, the total working hours of the ray source, the total number of system baggage and packages, and the total number of baggage packages this time, and clear the above data.
System parameter setting	It can select the exported data, pictures, and backup directory, select and adjust the motor type, detector type, whether to enable the debug mode, model, and gain, enter the corresponding IP address on network connection to realize sharing function, and have corresponding software to achieve system upgrade.

Compliance

International	*ISO19001 ; SO14001 ; ISO27001; OHSMS18001 ;CE ,ROHS, FCC, REACH, USFDA
National (Türkiye)	*Health Inspection Report.



Smartguard is brand of Polimek